



- Rated current: 1-10A
- Install way: Screw / plug
- Noise filter for medical equipment (A)

## Specification

- Rated Voltage: 110VAC-250VAC
- working frequency: 50/60HZ
- Rated Current: 1A-10A
- Withstand test voltage: 1750VAC
- Temperature range: -25°C~85°C
- Certificate: cUL,CQC,CE,ROHS
- Fire resistance: UL 94V-0


## Characteristic

- IEC general purpose socket input+ Filter circuit integrated design, small size and high performance.
- With high quality capacitor and High permeability Mn-Zn ferrite magnetic ring, excellent performance.
- It is good effective to solve the high frequency interference of 1Mhz to 30MHZ.
- There are a variety of parts combination collocation, to meet the requirement for testing different equipment.
- Can be customize according to customer requirements.


## Application

- Medical equipment
- Testing equipment
- Fire extinguishing system
- Monitoring and control system
- Audio equipment

## Products size

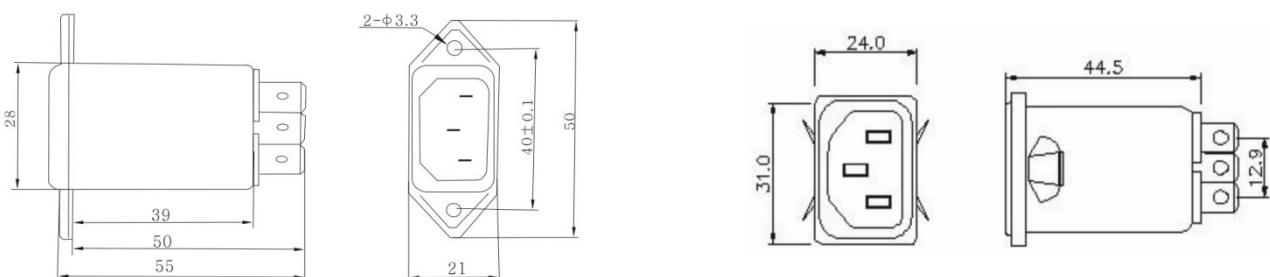

## Electric schematic

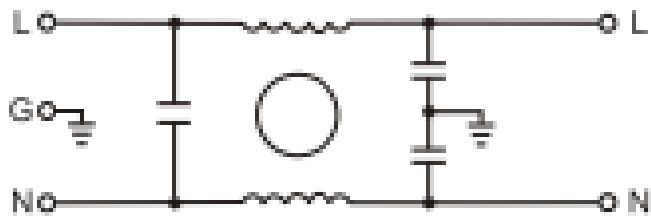

## Specification


Model No. (A)	Rated current(A)	leakage current(mA)	Inductance (mH)	Capacitor		Resistor [k Ω]	Weight (g)
				Cx [pF]	Cy [nF]		
DAI1-1A	1	≤0.5	20	0.1	3.3	0	55g
DAI1-3A	3	≤0.5	2.5	0.1	3.3	0	55g
DAI1-6A	6	≤0.5	0.8	0.1	3.3	0	55g
DAI1-10A	10	≤0.5	0.3	0.1	3.3	0	55g

## Insertion loss


Specification	(dB)	Frequency (MHz)					
		0.15	0.5	1	5	10	30
DAI1-1A	Common mode	36	49	49	51	55	59
	Differential mode	17	40	55	70	62	50
DAI1-3A	Common mode	30	44	55	53	54	60
	Differential mode	20	46	66	62	59	50
DAI1-6A	Common mode	25	35	42	51	58	51
	Differential mode	20	45	59	66	66	51
DAI1-10A	Common mode	24	38	50	68	64	50
	Differential mode	18	31	50	69	61	47

## Insertion Loss


———— ( Common Mode )      - - - - - ( Differential Mode )

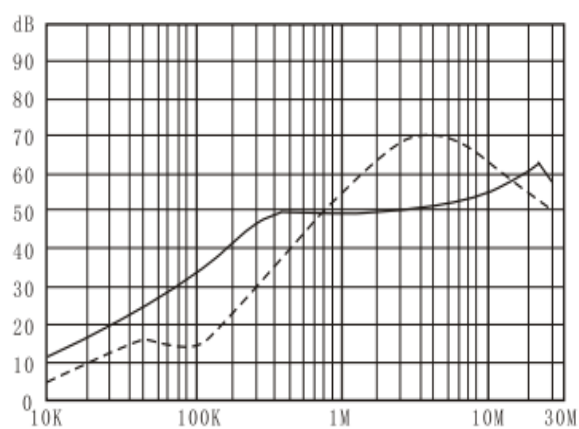


DAI1-1A

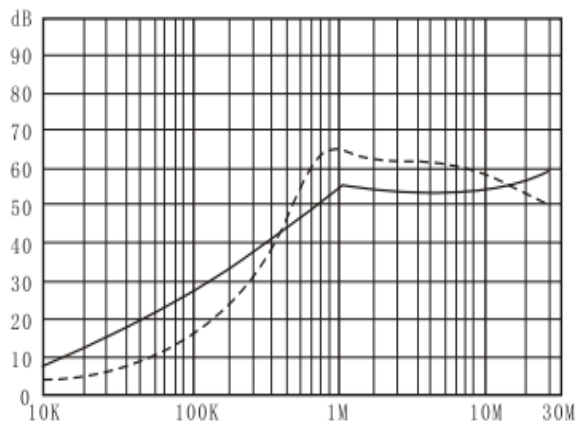

DAI1-3A

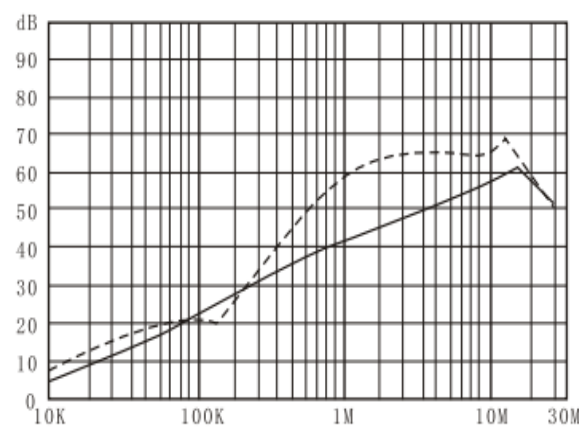

DAI1-6A

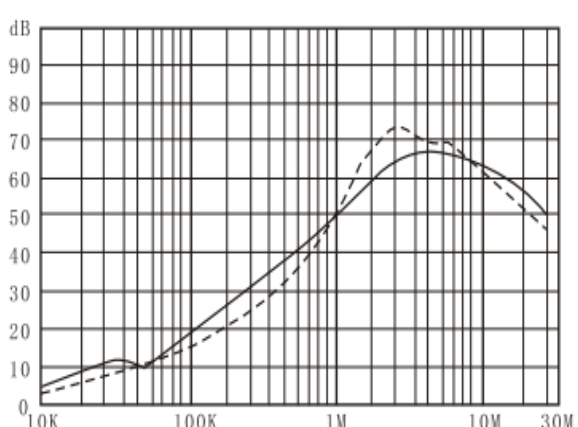

DAI1-10A