



Product information

Three-phase three-wire AC filter-DAC4-D

Description

Simple installation, bolt connection, customizable, single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2750VAC(line/ground)
Insulation Resistance	>50M @500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features

Rated current : 40A-100A

Strong anti-jamming

Low frequency performance is good, can be used for high current equipment

Can be customized upon request

Applications


Switching power supply

Power equipment such as UPS


Power monitoring equipment

Measuring equipment


Performance Indicator



Rated Current [A]

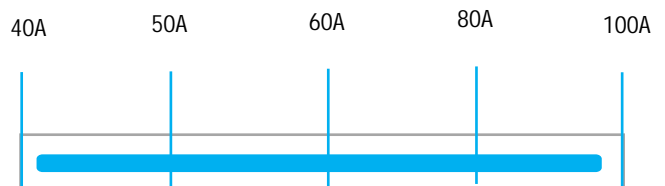


Typical Circuit Diagram

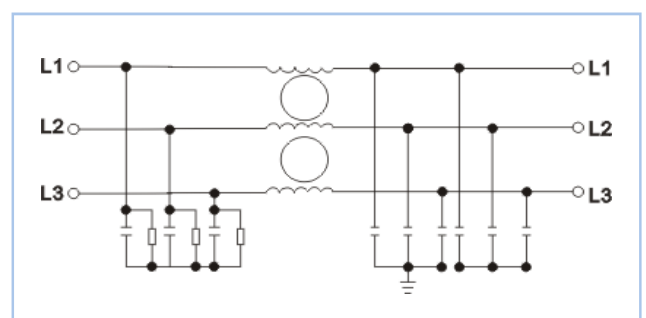

Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DAC4-40A-D	40A	<2.0mA	C4	Bolt	Bolt	CE、ROHS	Parameter customization
DAC4-50A-D	50A	<2.0mA	C4	Bolt	Bolt		
DAC4-60A-D	60A	<2.0mA	C4	Bolt	Bolt		
DAC4-80A-D	80A	<2.0mA	C4	Bolt	Bolt		
DAC4-100A-D	100A	<5.0mA	C4	Bolt	Bolt		

Overall Dimension (±1mm)

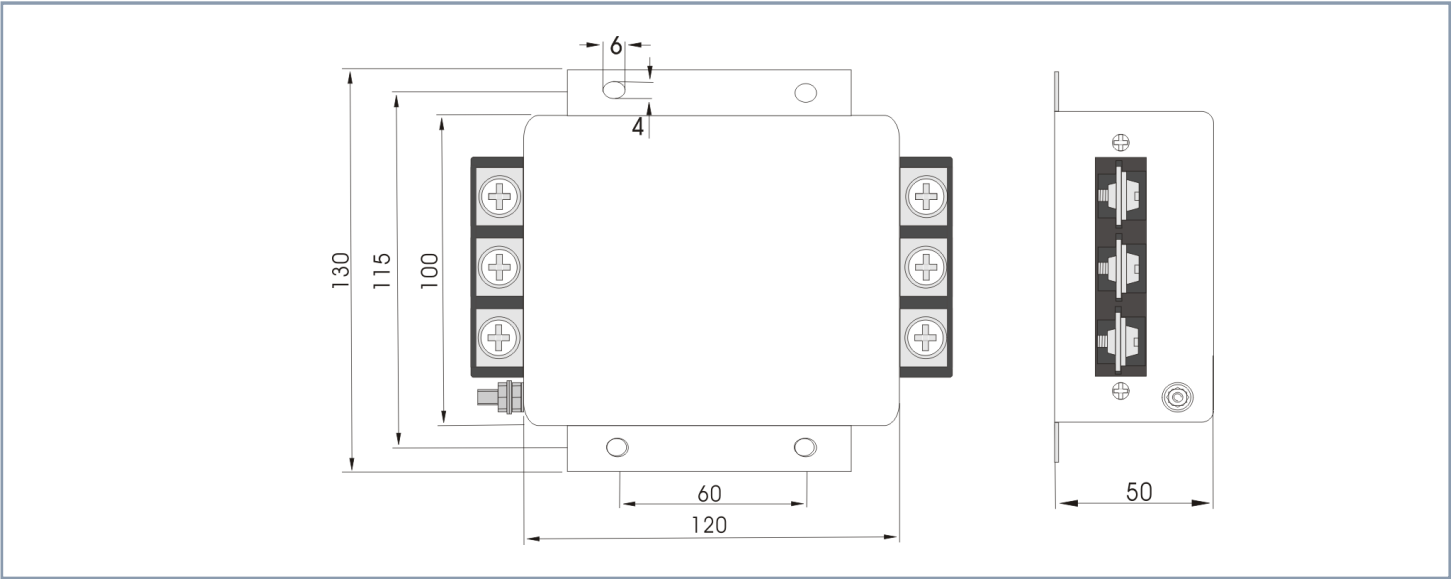

Insertion loss -(common mode)

