



**APPROVAL SHEET
FOR
PIEZO BUZZER**

常州富鸿达电子有限公司

CHANG ZHOU FHD ELECTRONICS CO., LTD.

CLUE No.:

MODEL NUMBER: BP2316-33

OUR PART No.:

CUSTOMER PART No.:

CUSTOMER	APPROVED	CHECKED

Add: Xujia Industrial Park, ZhenLu Town, Changzhou City, Jiangsu China.

江苏省常州市天宁区郑陆镇工业大道 2 号

Tel:+86-519-83822009

Fax:+86-519-88739926

Email: sales@czfhd.com;

<http://www.czfhd.com>

推荐规格书

Specification for Piezoelectric Ceramic Buzzer PIN Type		Des.	Page 3 of 6
		Wang Min	Update/2020-03-24
Model No.: BP2316-33	P/N:	Chk.	Apr.

2. Technical Parameter

Measuring condition


Part shall be measured under a condition (Temperature: 5~35°C, Humidity: 45%~85%R.H., Atmospheric pressure: 860 ~1060hPa) unless the standard condition (Temperature: 25±3°C, Humidity: 60±10%R.H. Atmospheric pressure: 860 ~1060hPa) is regulated to measure.



1	Resonant Frequency	3300Hz
2	Operating Voltage	1~30Vp-p
3	Rated Current	Max.5mA , At 3.3KHz 50% duty Square Wave 12Vp-p
4	Sound Output at 10cm	Min. 85dB, At 3.3KHz 50% duty Square Wave 12Vp-p
5	Capacitance	25000±30% pF At 120Hz
6	Operating Temperature	-20°C~+70°C
7	Store Temperature	-30°C~+80°C
8	Net Weight	Approx 5g
9	RoHS	Yes

3. Dimensions

Unit: mm

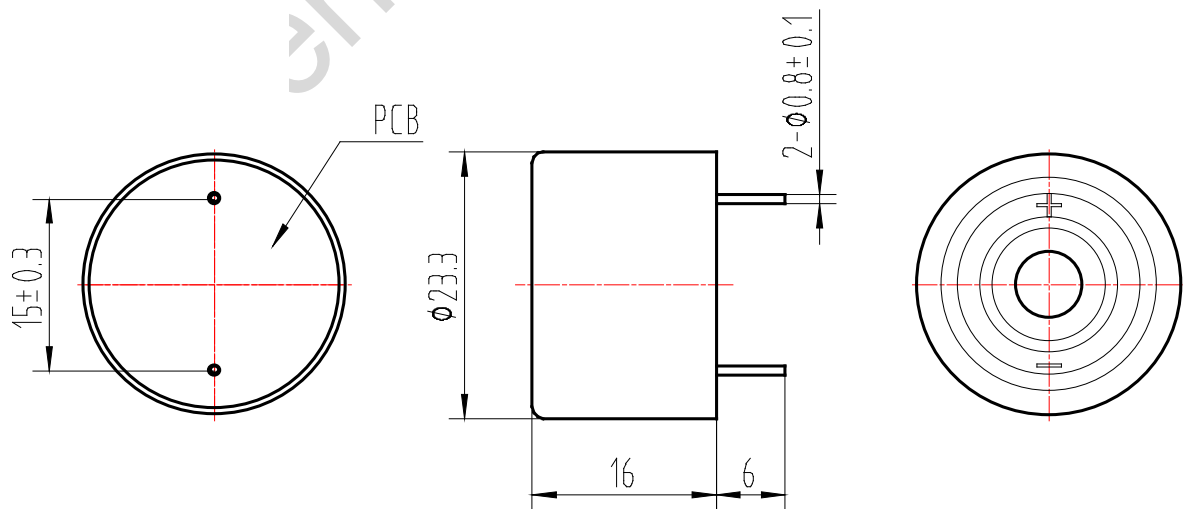


*Unit: mm; Tolerance: ± 0.5mm Except Specified

*Housing Material: Black PPO


Specification for Piezoelectric Ceramic Buzzer PIN Type		Des.	Page 4 of 6
		Wang Min	Update/2020-03-24
Model No.: BP2316-33	P/N:	Chk.	Apr.

4. Electrical And Acoustical Measuring Condition

Recommended Setting

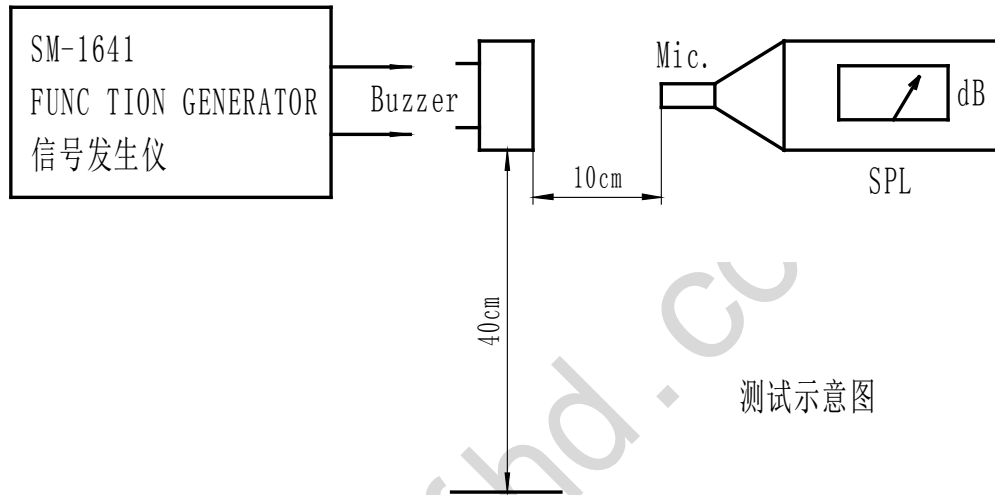

5. Frequency Response

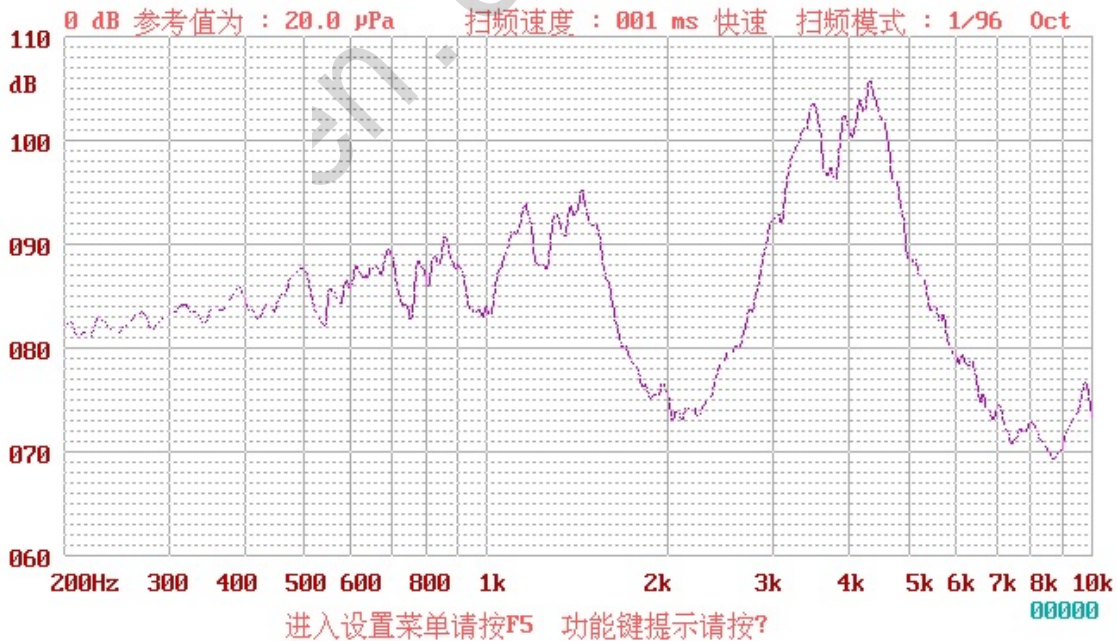

12Vp-p 50% duty Square wave, 10cm

Specification for Piezoelectric Ceramic Buzzer PIN Type		Des.	Page 5 of 6
		Wang Min	Update/2020-03-24
Model No.: BP2316-33	P/N:	Chk.	Apr.

6. Reliability Test

After any following tests the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall not deviate more than -5 dB from the initial value

6.1 Ordinary Temperature Life Test

The part shall be subjected to 96 hours at $25 \pm 10^\circ\text{C}$. Input rated voltage Resonant frequency, 1/2 duty Square wave.

6.2 High Temperature Test

The part shall be capable of with standing a storage temperature of $+80^\circ\text{C}$ for 96 hours.

6.3 Low Temperature Test

The part shall be capable of with standing a storage temperature of -30°C for 96 hours.

6.4 Humidity Test

Temperature: $+40^\circ\text{C} \pm 3^\circ\text{C}$ Relative Humidity: 90%~95% Duration: 48 hours and expose to room temperature for 6 hours

6.5 Temperature Shock Test

Temperature: 60°C /2hours \rightarrow -20°C /2hours (1cycle), Total cycle: 10 cycles

6.6 Drop Test

Standard Packaging From 75cm (Drop on hard wood or board of 5cm thick, three sides, six plain.)

6.7 Vibration Test


Vibration: 1000cycles /min. Amplitude: 1.5mm, Duration: 1 hour in each 3 axes

Note:

As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enter it.

Specification for Piezoelectric Ceramic Buzzer PIN Type		Des.	Page 6 of 6
		Wang Min	Update/2020-03-24
Model No.: BP2316-33	P/N:	Chk.	Apr.

7. Packing

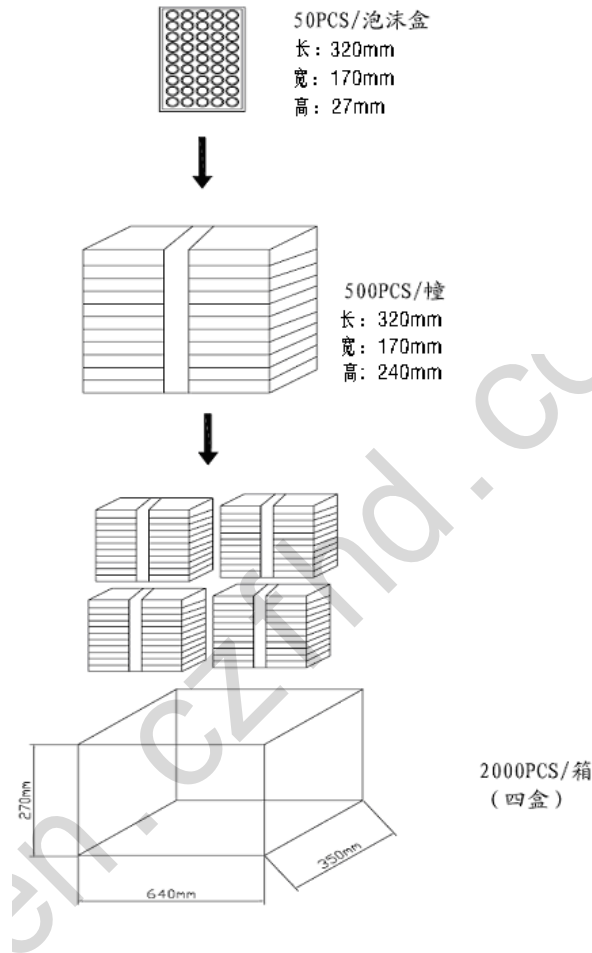

Approx. 8kg/箱