

灯具参数

灯具描述: 辉瑞-150W

灯具种类:

光源种类:

光源描述:

光源个数: 1

光源光通(lm): 18772.89

发光面长度(m): 0

发光面宽度(m): 150

发光面高度(m): 0

电压: 221.8 V

电流: 0.685 A

功率: 150.18 W

功率因数: 0.988

测试实验室: HuiPu-lab

测量模式: Type C

光度结果

CIE 分类: 直接型

灯具光通量: 18772.89 lm

发光效率: 125.003 lm/W

中心光强: 6191.232cd

最大光强: 7063.481cd

光束宽度(10%Imax): 153.66, 146.16

最大光强角度: C:30.0 G:33.0

半峰边角(50%Imax): 129.03, 120.78





灯具效率: 100.00%

路边上射光通比: 0.01%

屋边上射光通比: -0.01%

路边下射光通比: 64.44%

屋边下射光通比: 35.56%

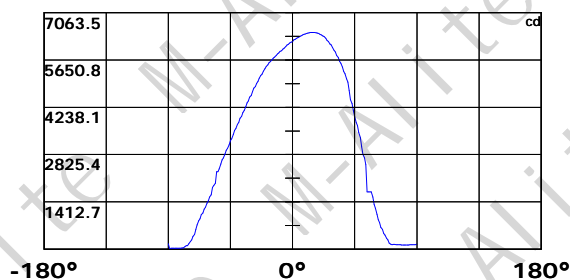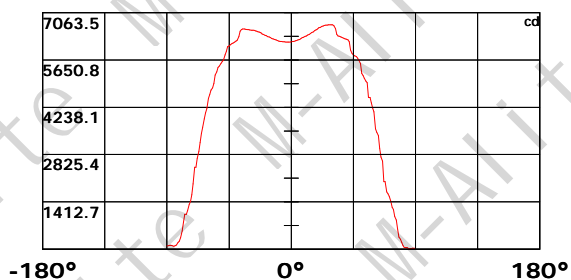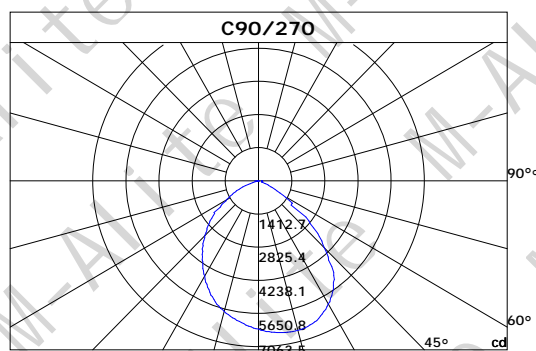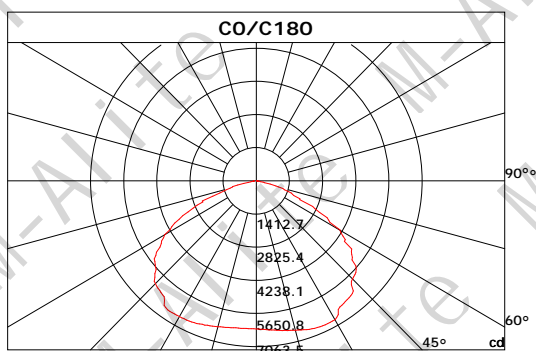

光强分布数据表格 单位[cd]

C\G	G0.0	G1.0	G2.0	G3.0	G4.0	G5.0	G6.0	G7.0	G8.0	G9.0
C0.0	6191.2	6201.3	6210.3	6224.9	6236.3	6254.9	6265.5	6290.6	6315.0	6328.8
C30.0	6191.2	6211.1	6239.5	6255.7	6291.5	6325.6	6341.8	6382.4	6397.0	6440.8
C60.0	6191.2	6181.9	6218.4	6237.1	6272.0	6291.5	6324.7	6359.6	6392.1	6408.4
C90.0	6191.2	6254.1	6272.0	6306.1	6322.3	6352.3	6367.8	6390.5	6412.4	6424.6
C120.0	6191.2	6194.0	6224.1	6238.7	6268.7	6298.0	6311.8	6338.5	6363.7	6375.9
C150.0	6191.2	6211.1	6232.2	6252.5	6263.9	6286.6	6298.8	6323.9	6352.3	6370.2
C180.0	6191.2	6189.2	6185.9	6188.4	6187.5	6190.8	6194.9	6200.5	6200.5	6218.4
C210.0	6191.2	6181.9	6143.7	6129.1	6104.7	6093.4	6071.5	6052.8	6041.4	6023.6
C240.0	6191.2	6125.0	6085.3	6045.5	6023.6	5983.8	5961.9	5919.7	5879.1	5841.7
C270.0	6191.2	6182.7	6156.7	6116.9	6097.4	6050.4	6004.9	5978.1	5928.6	5905.9
C300.0	6191.2	6143.7	6108.8	6075.5	6057.7	6024.4	6008.1	5974.9	5940.8	5926.1
C330.0	6191.2	6185.1	6179.4	6167.3	6155.1	6155.1	6135.6	6134.0	6127.5	6124.2
C360.0	6191.2	6201.3	6210.3	6224.9	6236.3	6254.9	6265.5	6290.6	6315.0	6328.8
C\G	G10.0	G11.0	G12.0	G13.0	G14.0	G15.0	G16.0	G17.0	G18.0	G19.0
C0.0	6354.8	6369.4	6397.8	6411.6	6444.1	6475.7	6492.8	6526.1	6547.2	6580.5
C30.0	6459.5	6501.7	6537.4	6559.4	6600.8	6618.6	6659.2	6708.7	6729.8	6773.7
C60.0	6408.4	6454.6	6484.7	6513.9	6530.1	6556.1	6568.3	6587.8	6604.8	6612.1
C90.0	6441.6	6454.6	6461.9	6470.9	6473.3	6475.7	6470.1	6461.1	6455.4	6438.4
C120.0	6395.4	6409.2	6430.3	6448.1	6458.7	6478.2	6487.1	6502.5	6518.0	6522.0
C150.0	6401.9	6432.7	6448.1	6482.2	6514.7	6534.2	6572.3	6608.1	6624.3	6660.0
C180.0	6234.6	6252.5	6261.4	6281.7	6292.3	6314.2	6334.5	6349.1	6374.3	6387.3
C210.0	6017.9	6003.3	5993.5	5991.1	5987.8	5973.2	5970.0	5965.1	5957.0	5948.1
C240.0	5822.2	5800.3	5763.0	5719.1	5696.4	5650.9	5628.2	5573.8	5517.8	5487.0
C270.0	5860.4	5835.2	5786.5	5736.2	5711.0	5658.3	5601.4	5569.8	5501.6	5464.2
C300.0	5895.3	5879.9	5849.0	5817.4	5798.7	5763.0	5742.7	5696.4	5670.4	5616.9
C330.0	6120.2	6118.5	6116.1	6117.7	6117.7	6120.2	6123.4	6125.0	6125.9	6131.5
C360.0	6354.8	6369.4	6397.8	6411.6	6444.1	6475.7	6492.8	6526.1	6547.2	6580.5
C\G	G20.0	G21.0	G22.0	G23.0	G24.0	G25.0	G26.0	G27.0	G28.0	G29.0
C0.0	6614.6	6627.5	6651.9	6663.3	6677.9	6691.7	6694.9	6699.0	6700.6	6699.8
C30.0	6815.9	6835.4	6871.9	6907.6	6923.0	6951.5	6980.7	6992.0	7009.9	7025.3
C60.0	6627.5	6632.4	6639.7	6641.3	6636.5	6631.6	6624.3	6605.6	6592.6	6555.3
C90.0	6410.8	6400.2	6367.8	6349.1	6298.8	6236.3	6202.2	6133.2	6097.4	6022.8
C120.0	6529.3	6536.6	6542.3	6545.6	6547.2	6541.5	6533.4	6507.4	6493.6	6461.1
C150.0	6699.0	6717.7	6754.2	6769.6	6807.0	6819.1	6850.0	6878.4	6891.4	6910.1
C180.0	6415.7	6427.8	6457.9	6482.2	6492.8	6514.7	6518.8	6534.2	6537.4	6543.9
C210.0	5939.9	5930.2	5922.1	5904.2	5896.9	5879.1	5858.8	5856.3	5836.0	5823.9
C240.0	5424.5	5391.2	5325.4	5261.3	5230.4	5164.7	5129.8	5047.8	4965.8	4923.6
C270.0	5388.7	5310.8	5230.4	5188.2	5100.5	5007.2	4954.4	4857.8	4807.5	4702.8
C300.0	5556.0	5523.5	5458.6	5426.9	5356.3	5288.1	5250.7	5170.4	5081.9	5035.6
C330.0	6132.3	6133.2	6127.5	6125.0	6115.3	6099.1	6090.1	6068.2	6046.3	6039.0
C360.0	6614.6	6627.5	6651.9	6663.3	6677.9	6691.7	6694.9	6699.0	6700.6	6699.8

光强分布数据表格 单位[cd]

C\G	G30.0	G31.0	G32.0	G33.0	G34.0	G35.0	G36.0	G37.0	G38.0	G39.0
C0.0	6706.3	6668.9	6590.2	6410.0	6365.3	6354.8	6336.9	6316.6	6302.8	6285.0
C30.0	7035.1	7046.4	7052.1	7063.5	6996.9	6957.9	6929.5	6936.0	6940.9	6935.2
C60.0	6517.1	6495.2	6445.7	6416.5	6357.2	6287.4	6215.1	6176.2	6089.3	5992.7
C90.0	5934.3	5892.9	5785.7	5729.7	5615.2	5556.8	5435.8	5305.9	5239.4	5085.1
C120.0	6421.3	6397.8	6345.0	6288.2	6258.2	6191.6	6117.7	6078.0	5979.7	5876.6
C150.0	6916.5	6932.0	6945.0	6956.3	6977.4	6989.6	7014.8	7018.8	7007.5	6906.8
C180.0	6550.4	6554.5	6565.0	6569.9	6577.2	6579.6	6557.7	6513.1	6352.3	6239.5
C210.0	5793.0	5754.0	5732.1	5682.6	5658.3	5607.9	5585.2	5538.9	5489.4	5465.9
C240.0	4839.1	4753.1	4708.4	4619.1	4522.5	4476.3	4374.8	4270.9	4215.7	4107.7
C270.0	4592.4	4538.8	4425.1	4369.1	4254.6	4139.4	4080.9	3966.5	3907.2	3787.1
C300.0	4885.4	4835.9	4785.6	4684.9	4581.8	4529.8	4423.5	4315.5	4259.5	4143.4
C330.0	6013.0	6000.0	5969.2	5932.6	5912.3	5870.1	5870.1	5727.3	5628.2	5415.5
C360.0	6706.3	6668.9	6590.2	6410.0	6365.3	6354.8	6336.9	6316.6	6302.8	6285.0
C\G	G40.0	G41.0	G42.0	G43.0	G44.0	G45.0	G46.0	G47.0	G48.0	G49.0
C0.0	6270.4	6247.6	6191.6	5945.6	5841.7	5800.3	5777.6	5754.9	5707.8	5639.6
C30.0	6920.6	6914.9	6907.6	6881.6	6865.4	6764.7	6625.1	6557.7	6484.7	6444.1
C60.0	5944.0	5828.7	5698.0	5622.5	5463.4	5374.1	5141.1	4860.3	4679.2	4466.5
C90.0	4991.0	4746.6	4464.9	4351.3	4152.4	3968.1	3784.6	3691.3	3482.6	3338.1
C120.0	5821.4	5705.3	5583.6	5515.4	5374.1	5295.4	5103.8	4954.4	4658.9	4443.8
C150.0	6845.1	6791.5	6769.6	6760.7	6739.6	6705.5	6685.2	6636.5	6573.2	6500.9
C180.0	6216.0	6183.5	6159.1	6141.3	6112.1	6074.7	6047.9	5910.7	5804.4	5645.3
C210.0	5410.7	5346.5	5298.6	5151.7	4989.3	4912.2	4830.2	4758.0	4721.4	4650.0
C240.0	4052.5	3938.9	3826.0	3760.3	3640.9	3585.7	3412.0	3352.7	3294.3	3179.0
C270.0	3728.6	3606.8	3542.7	3418.5	3301.6	3237.5	3122.2	3011.0	2955.0	2841.3
C300.0	4088.2	3978.6	3867.4	3755.4	3701.0	3646.6	3534.6	3479.4	3358.4	3159.5
C330.0	5359.5	5333.5	5274.3	5243.4	5179.3	5102.2	5060.8	4973.9	4899.2	4630.5
C360.0	6270.4	6247.6	6191.6	5945.6	5841.7	5800.3	5777.6	5754.9	5707.8	5639.6
C\G	G50.0	G51.0	G52.0	G53.0	G54.0	G55.0	G56.0	G57.0	G58.0	G59.0
C0.0	5543.0	5252.4	5191.5	5105.4	5016.9	4967.4	4531.5	4531.5	4369.1	4211.6
C30.0	6358.8	6261.4	6208.7	6030.9	5867.7	5801.1	5646.9	5460.2	5351.4	5084.3
C60.0	4375.6	4286.3	4079.3	3873.1	3758.6	3463.1	3169.3	3061.3	2830.8	2588.8
C90.0	3058.1	2829.1	2727.7	2521.5	1713.7	1713.7	1713.7	1713.7	1557.8	1335.4
C120.0	4360.2	4186.5	4000.6	3907.2	3690.4	3533.0	3170.1	3058.9	2840.5	2611.6
C150.0	6345.8	6240.3	6188.4	6070.6	6007.3	5858.0	5629.8	5534.0	5327.0	5215.0
C180.0	5607.1	5542.2	5471.5	5433.4	5297.0	5198.8	4949.6	4814.8	4753.9	4615.1
C210.0	4573.7	4531.5	4408.9	4305.8	4051.7	3884.5	3818.7	3676.6	3605.2	3447.7
C240.0	3118.1	2993.1	2865.7	2799.9	2662.7	2591.3	2409.4	2295.0	2067.7	1887.4
C270.0	2726.8	2667.6	2539.3	2402.9	2316.9	2316.9	1971.1	1906.9	1844.4	1621.2
C300.0	3159.5	2969.6	2750.4	2659.5	2484.1	2408.6	2047.4	2047.4	1964.6	1716.1
C330.0	4464.1	4384.5	4266.0	4132.9	4072.8	3932.4	3615.8	3517.5	3391.7	3253.7
C360.0	5543.0	5252.4	5191.5	5105.4	5016.9	4967.4	4531.5	4531.5	4369.1	4211.6

光强分布数据表格 单位[cd]

C\G	G60.0	G61.0	G62.0	G63.0	G64.0	G65.0	G66.0	G67.0	G68.0	G69.0
C0.0	4106.1	3593.0	3493.2	3390.1	3010.2	2751.2	2631.9	2013.3	2013.3	1708.0
C30.0	4788.8	4632.9	4295.2	3915.3	3716.4	3289.4	3067.8	2667.6	2474.4	1713.7
C60.0	2458.9	2312.8	2056.3	1845.2	1627.7	1493.7	1281.0	1082.1	1034.2	1034.2
C90.0	1219.3	1040.7	883.2	791.0	647.2	592.0	465.9	417.3	324.6	280.2
C120.0	2492.2	2343.7	2034.4	1822.5	1618.7	1505.9	1269.7	1182.0	1034.2	833.7
C150.0	4967.4	4667.0	4473.0	4136.9	3964.0	3590.6	3231.8	3040.2	2674.1	2497.1
C180.0	4501.4	4197.0	4072.8	3894.2	3648.2	3452.6	3179.0	2916.8	2716.3	2441.9
C210.0	3231.8	3100.3	2942.0	2868.1	2700.1	2564.5	2415.1	2076.6	1982.4	1734.8
C240.0	1708.8	1647.1	1495.3	1428.0	1299.7	1159.3	1080.5	951.4	835.3	776.2
C270.0	1557.0	1438.5	1371.9	1254.2	1193.3	1075.6	1032.6	906.8	847.5	722.0
C300.0	1716.1	1566.8	1387.4	1260.7	1201.5	1077.3	1016.4	881.6	766.2	708.1
C330.0	3183.9	2972.8	2694.4	2593.7	2408.6	2303.9	1986.5	1801.4	1684.5	1419.8
C360.0	4106.1	3593.0	3493.2	3390.1	3010.2	2751.2	2631.9	2013.3	2013.3	1708.0
C\G	G70.0	G71.0	G72.0	G73.0	G74.0	G75.0	G76.0	G77.0	G78.0	G79.0
C0.0	1651.2	1574.1	1420.7	1254.2	1180.4	975.0	869.4	603.9	363.8	294.9
C30.0	1713.7	1698.3	1448.3	1290.8	1023.7	744.7	610.7	410.4	339.9	170.0
C60.0	677.0	606.7	471.5	362.6	311.0	264.6	172.4	154.6	124.6	111.8
C90.0	183.3	158.0	137.1	141.7	139.8	134.1	134.1	128.0	128.0	125.3
C120.0	693.4	614.9	555.1	440.6	329.8	329.8	172.7	149.4	119.0	107.2
C150.0	1711.3	1711.3	1676.4	1395.5	1265.6	864.6	739.4	615.4	410.1	168.0
C180.0	2441.9	1951.6	1626.8	1422.3	1333.8	1159.3	1037.5	1037.5	802.1	545.0
C210.0	1608.2	1365.4	1084.6	1037.5	825.6	658.5	539.8	417.0	326.5	287.5
C240.0	648.0	505.4	427.2	307.9	261.4	186.9	143.2	86.1	86.1	86.1
C270.0	592.2	442.8	379.8	269.9	232.3	162.6	105.7	105.7	70.8	35.9
C300.0	581.5	448.4	374.1	265.0	192.4	156.0	67.2	67.2	67.2	44.6
C330.0	1328.1	1039.9	1039.9	763.9	627.5	562.4	456.4	414.8	332.8	294.5
C360.0	1651.2	1574.1	1420.7	1254.2	1180.4	975.0	869.4	603.9	363.8	294.9
C\G	G80.0	G81.0	G82.0	G83.0	G84.0	G85.0	G86.0	G87.0	G88.0	G89.0
C0.0	202.1	109.2	47.9	47.9	47.9	19.9	19.9	19.9	29.3	29.3
C30.0	87.6	87.6	87.6	87.6	67.9	67.9	67.9	64.8	58.4	53.1
C60.0	104.3	155.9	155.9	155.9	147.0	147.0	143.2	143.2	143.2	133.1
C90.0	125.3	125.3	125.3	125.3	125.3	127.2	127.2	130.5	130.5	137.4
C120.0	103.0	90.2	90.2	90.2	79.0	67.8	67.8	67.8	67.8	42.5
C150.0	168.0	79.3	79.3	79.3	54.6	54.6	54.6	52.4	55.3	64.4
C180.0	338.4	235.7	195.3	123.3	105.8	85.9	101.8	117.8	117.8	107.8
C210.0	251.1	138.5	142.8	147.1	148.9	148.9	148.9	148.9	142.5	148.0
C240.0	86.1	86.1	86.1	86.1	84.1	84.1	84.1	81.5	81.0	78.9
C270.0	35.9	28.5	28.5	28.5	28.5	28.5	28.5	28.5	24.6	20.8
C300.0	44.6	44.6	42.2	46.6	46.6	43.4	43.4	43.4	43.4	46.6
C330.0	200.1	122.0	104.4	104.4	104.4	104.4	50.1	50.1	50.1	52.0
C360.0	202.1	109.2	47.9	47.9	47.9	19.9	19.9	19.9	29.3	29.3

光强分布数据表格 单位[cd]

C\G	G90.0								
C0.0	7.5								
C30.0	47.8								
C60.0	156.1								
C90.0	147.3								
C120.0	36.9								
C150.0	71.8								
C180.0	95.6								
C210.0	153.6								
C240.0	74.1								
C270.0	164.1								
C300.0	51.4								
C330.0	67.2								
C360.0	7.5								


环带光通分布数据表

Gamma [°]	平均光强 [cd]	环带光通 [lm]	累积光通 [lm]	环带光通 [%]	累积光通 [%]
0.0	6191.23	0.00	0.00	0.00	0.00
0.0-1.0	6188.43	5.92	5.92	0.03	0.03
1.0-2.0	6188.02	17.76	23.69	0.09	0.13
2.0-3.0	6186.47	29.60	53.28	0.16	0.28
3.0-4.0	6190.05	41.43	94.71	0.22	0.50
4.0-5.0	6192.22	53.27	147.98	0.28	0.79
5.0-6.0	6190.59	65.07	213.05	0.35	1.13
6.0-7.0	6195.46	76.88	289.93	0.41	1.54
7.0-8.0	6195.87	88.68	378.62	0.47	2.02
8.0-9.0	6199.05	100.45	479.07	0.54	2.55
9.0-10.0	6201.01	112.22	591.29	0.60	3.15
10.0-11.0	6209.33	124.00	715.29	0.66	3.81
11.0-12.0	6210.82	135.77	851.06	0.72	4.53
12.0-13.0	6212.44	147.43	998.49	0.79	5.32
13.0-14.0	6218.80	159.12	1157.61	0.85	6.17
14.0-15.0	6218.19	170.74	1328.35	0.91	7.08
15.0-16.0	6220.83	182.27	1510.62	0.97	8.05
16.0-17.0	6222.79	193.78	1704.40	1.03	9.08
17.0-18.0	6218.87	205.14	1909.54	1.09	10.17
18.0-19.0	6218.46	216.38	2125.92	1.15	11.32
19.0-20.0	6212.85	227.53	2353.45	1.21	12.54
20.0-21.0	6205.54	238.46	2591.91	1.27	13.81
21.0-22.0	6195.80	249.21	2841.12	1.33	15.13
22.0-23.0	6188.70	259.86	3100.98	1.38	16.52
23.0-24.0	6173.54	270.28	3371.26	1.44	17.96
24.0-25.0	6152.03	280.26	3651.52	1.49	19.45
25.0-26.0	6140.67	290.17	3941.69	1.55	21.00
26.0-27.0	6112.52	299.78	4241.46	1.60	22.59
27.0-28.0	6088.37	308.90	4550.36	1.65	24.24
28.0-29.0	6061.92	317.89	4868.25	1.69	25.93
29.0-30.0	6017.00	326.13	5194.38	1.74	27.67
30.0-31.0	5989.13	334.11	5528.49	1.78	29.45
31.0-32.0	5945.77	341.92	5870.41	1.82	31.27
32.0-33.0	5893.54	348.79	6219.20	1.86	33.13
33.0-34.0	5839.76	355.08	6574.29	1.89	35.02
34.0-35.0	5795.11	361.34	6935.62	1.92	36.94
35.0-36.0	5745.18	367.45	7303.07	1.96	38.90
36.0-37.0	5680.31	372.64	7675.70	1.98	40.89
37.0-38.0	5617.66	377.11	8052.81	2.01	42.90
38.0-39.0	5520.04	380.16	8432.97	2.03	44.92
39.0-40.0	5470.66	383.32	8816.29	2.04	46.96


环带光通分布数据表

Gamma [°]	平均光强 [cd]	环带光通 [lm]	累积光通 [lm]	环带光通 [%]	累积光通 [%]
40.0-41.0	5385.22	386.57	9202.86	2.06	49.02
41.0-42.0	5298.63	388.16	9591.02	2.07	51.09
42.0-43.0	5212.30	389.36	9980.38	2.07	53.16
43.0-44.0	5113.40	389.72	10370.10	2.08	55.24
44.0-45.0	5038.92	390.17	10760.26	2.08	57.32
45.0-46.0	4927.09	389.75	11150.01	2.08	59.39
46.0-47.0	4828.39	388.00	11538.01	2.07	61.46
47.0-48.0	4718.26	385.93	11923.94	2.06	63.52
48.0-49.0	4578.22	381.77	12305.70	2.03	65.55
49.0-50.0	4474.24	377.43	12683.13	2.01	67.56
50.0-51.0	4345.37	373.14	13056.27	1.99	69.55
51.0-52.0	4224.82	367.75	13424.02	1.96	71.51
52.0-53.0	4103.59	362.28	13786.31	1.93	73.44
53.0-54.0	3911.66	353.28	14139.59	1.88	75.32
54.0-55.0	3805.72	344.49	14484.08	1.84	77.15
55.0-56.0	3556.10	332.66	14816.74	1.77	78.93
56.0-57.0	3468.15	321.16	15137.90	1.71	80.64
57.0-58.0	3325.34	314.15	15452.05	1.67	82.31
58.0-59.0	3132.33	301.90	15753.95	1.61	83.92
59.0-60.0	2994.33	289.45	16043.40	1.54	85.46
60.0-61.0	2792.73	276.17	16319.57	1.47	86.93
61.0-62.0	2599.93	259.85	16579.42	1.38	88.32
62.0-63.0	2433.33	244.79	16824.21	1.30	89.62
63.0-64.0	2252.97	229.96	17054.16	1.22	90.84
64.0-65.0	2071.32	214.01	17268.17	1.14	91.98
65.0-66.0	1888.18	197.55	17465.72	1.05	93.04
66.0-67.0	1661.42	178.48	17644.20	0.95	93.99
67.0-68.0	1532.25	161.78	17805.98	0.86	94.85
68.0-69.0	1322.49	145.64	17951.61	0.78	95.63
69.0-70.0	1152.48	127.11	18078.72	0.68	96.30
70.0-71.0	1009.73	111.75	18190.48	0.60	96.90
71.0-72.0	886.78	98.61	18289.09	0.53	97.42
72.0-73.0	745.99	85.38	18374.47	0.45	97.88
73.0-74.0	643.60	73.05	18447.53	0.39	98.27
74.0-75.0	516.54	61.30	18508.83	0.33	98.59
75.0-76.0	420.71	49.75	18558.58	0.27	98.86
76.0-77.0	349.17	41.05	18599.63	0.22	99.08
77.0-78.0	264.25	32.84	18632.46	0.17	99.25
78.0-79.0	189.24	24.37	18656.83	0.13	99.38
79.0-80.0	145.54	18.05	18674.88	0.10	99.48
80.0-81.0	108.57	13.74	18688.62	0.07	99.55


道路灯具等光强曲线 (圆形网图)

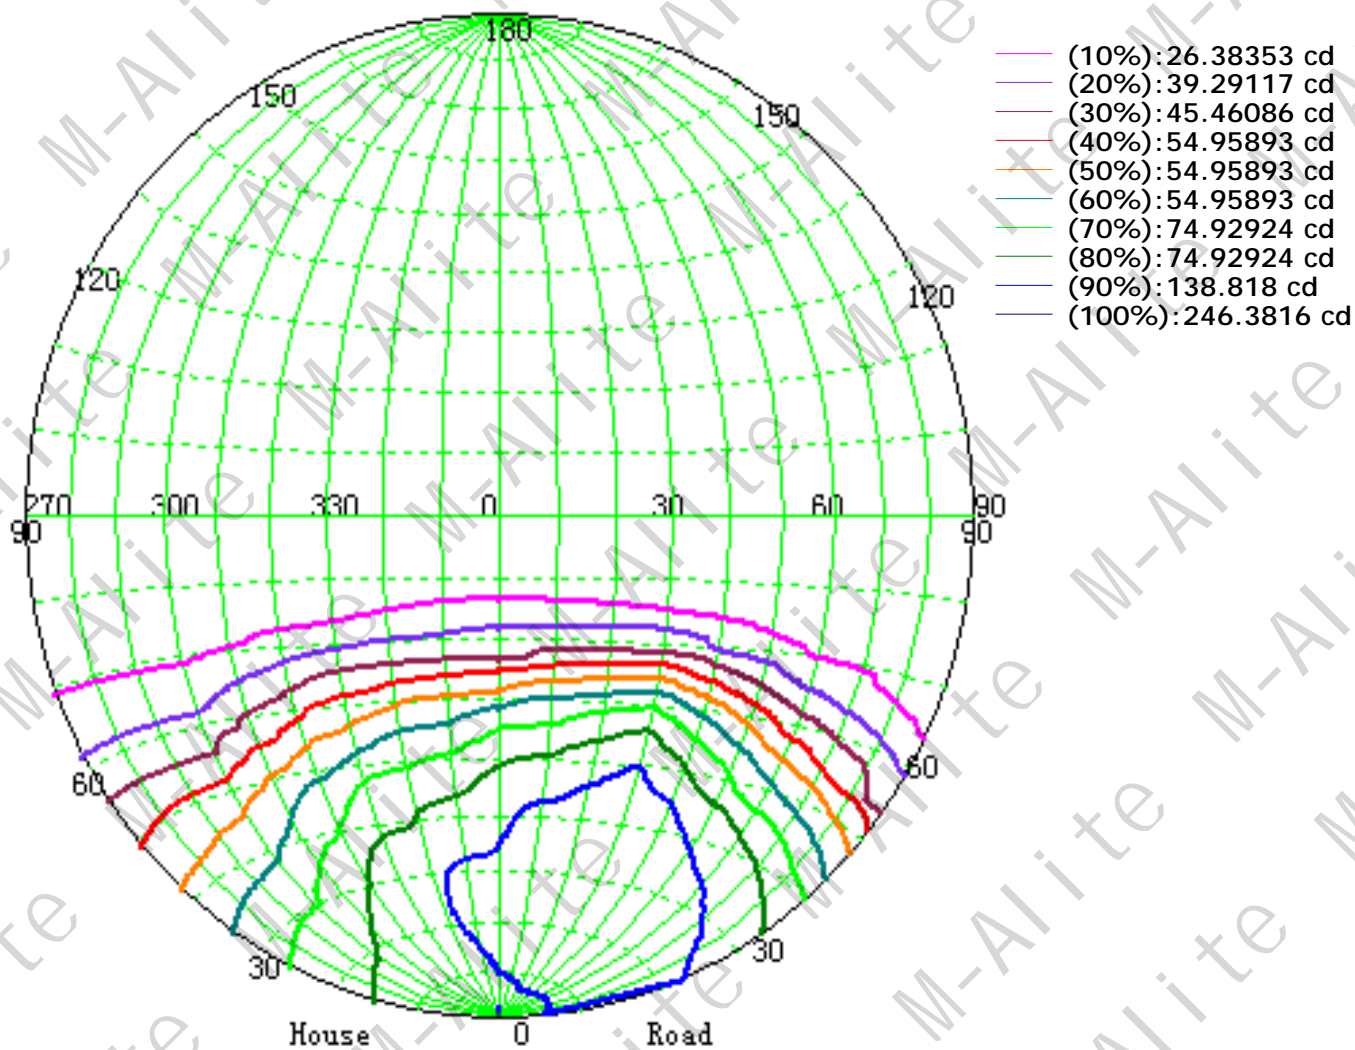

道路灯具利用系数曲线

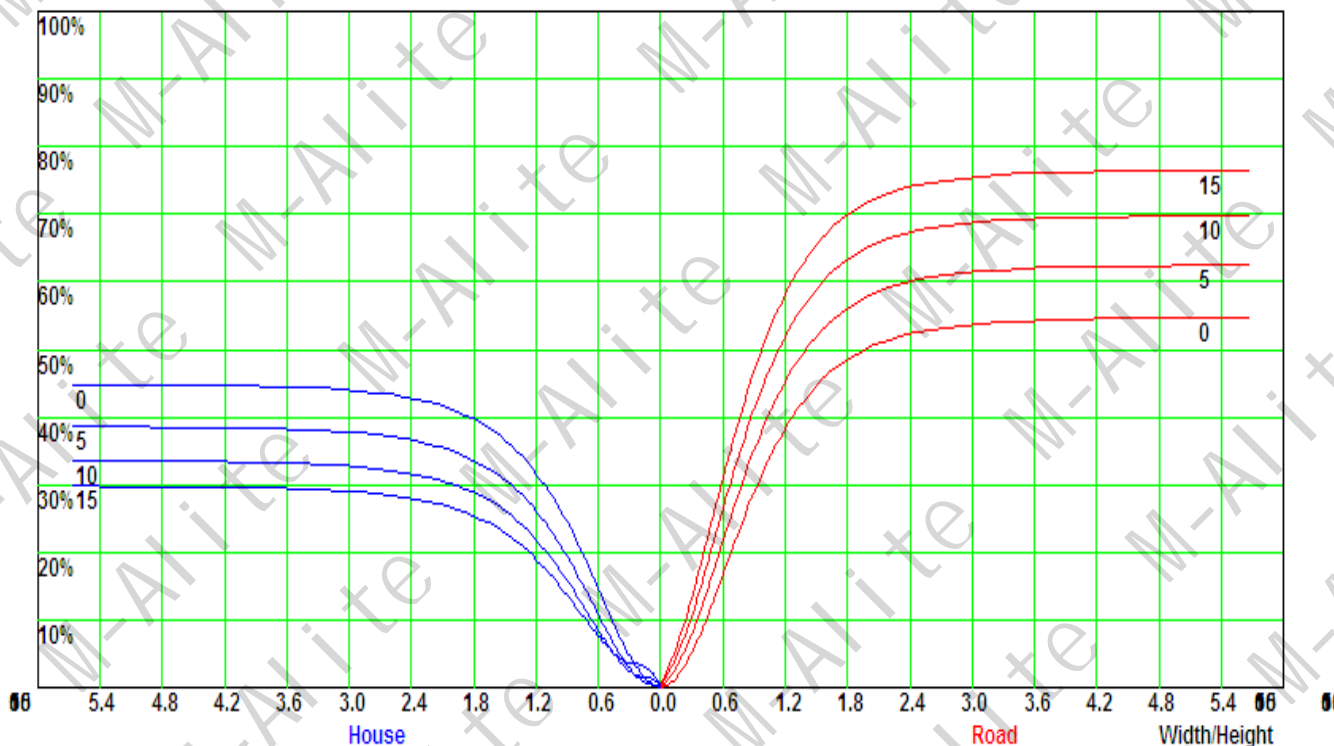


等光强曲线(矩形网图)

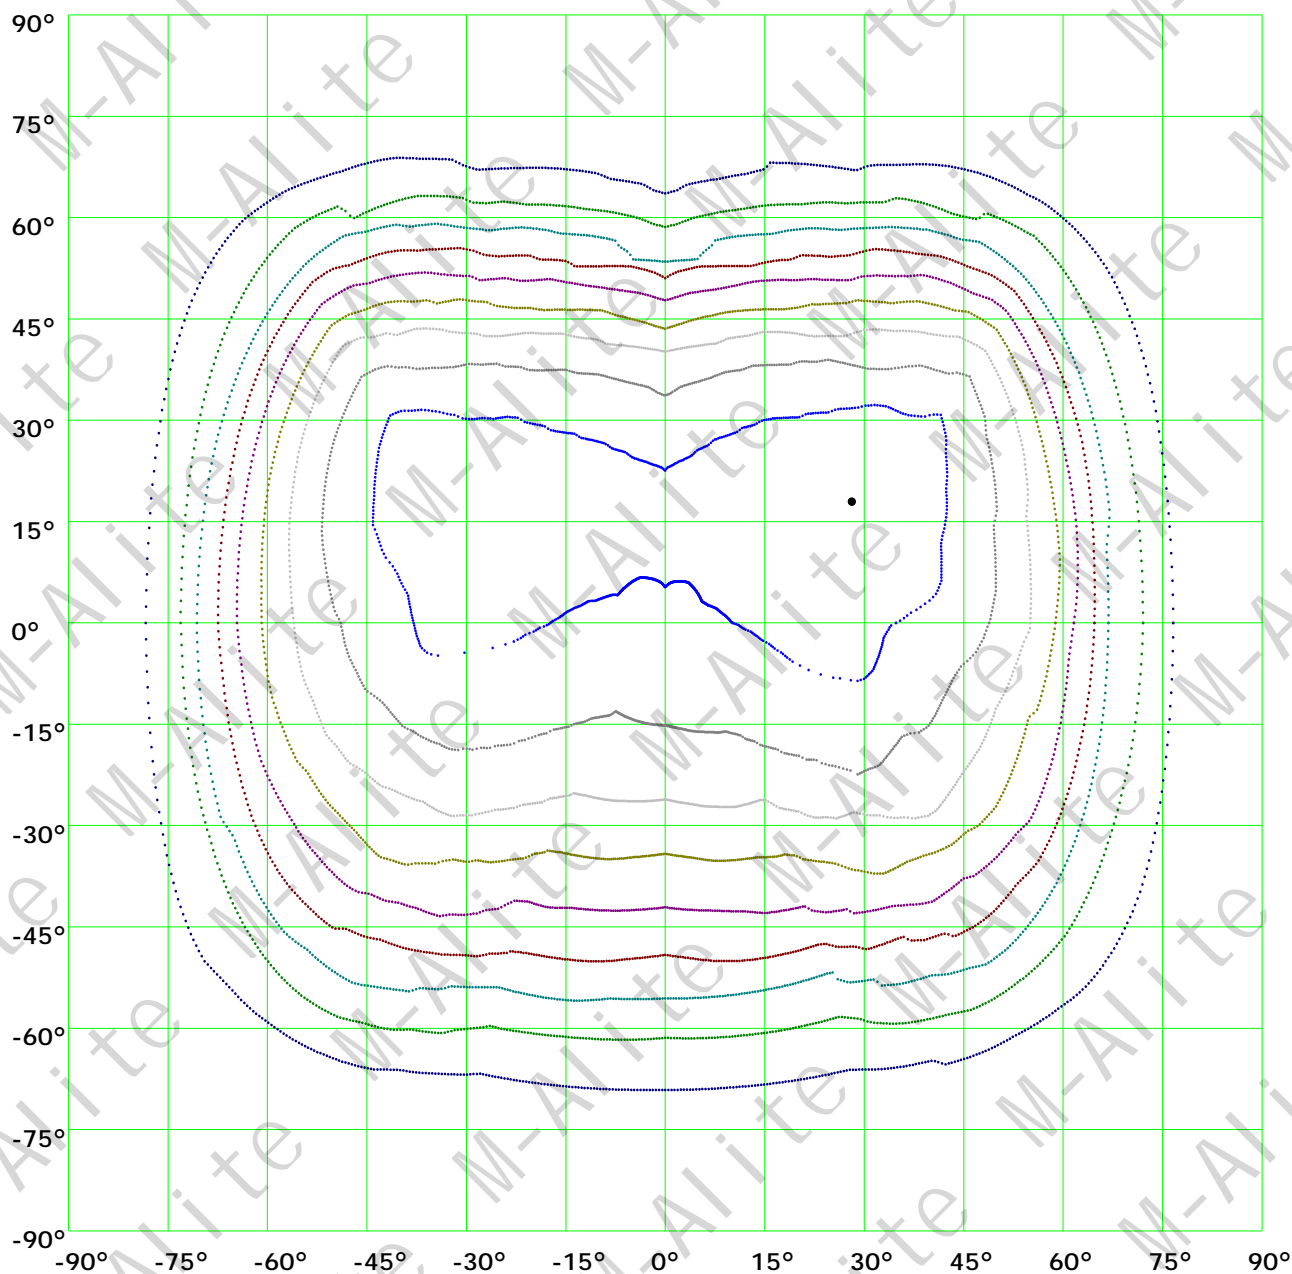

(10%): 706.3cd	(20%): 1412.7cd	(30%): 2119.1cd	(40%): 2825.4cd
(50%): 3531.7cd	(60%): 4238.1cd	(70%): 4944.4cd	(80%): 5650.8cd
(90%): 6357.1cd	(100%): 7063.5cd		


相对平面等照度曲线

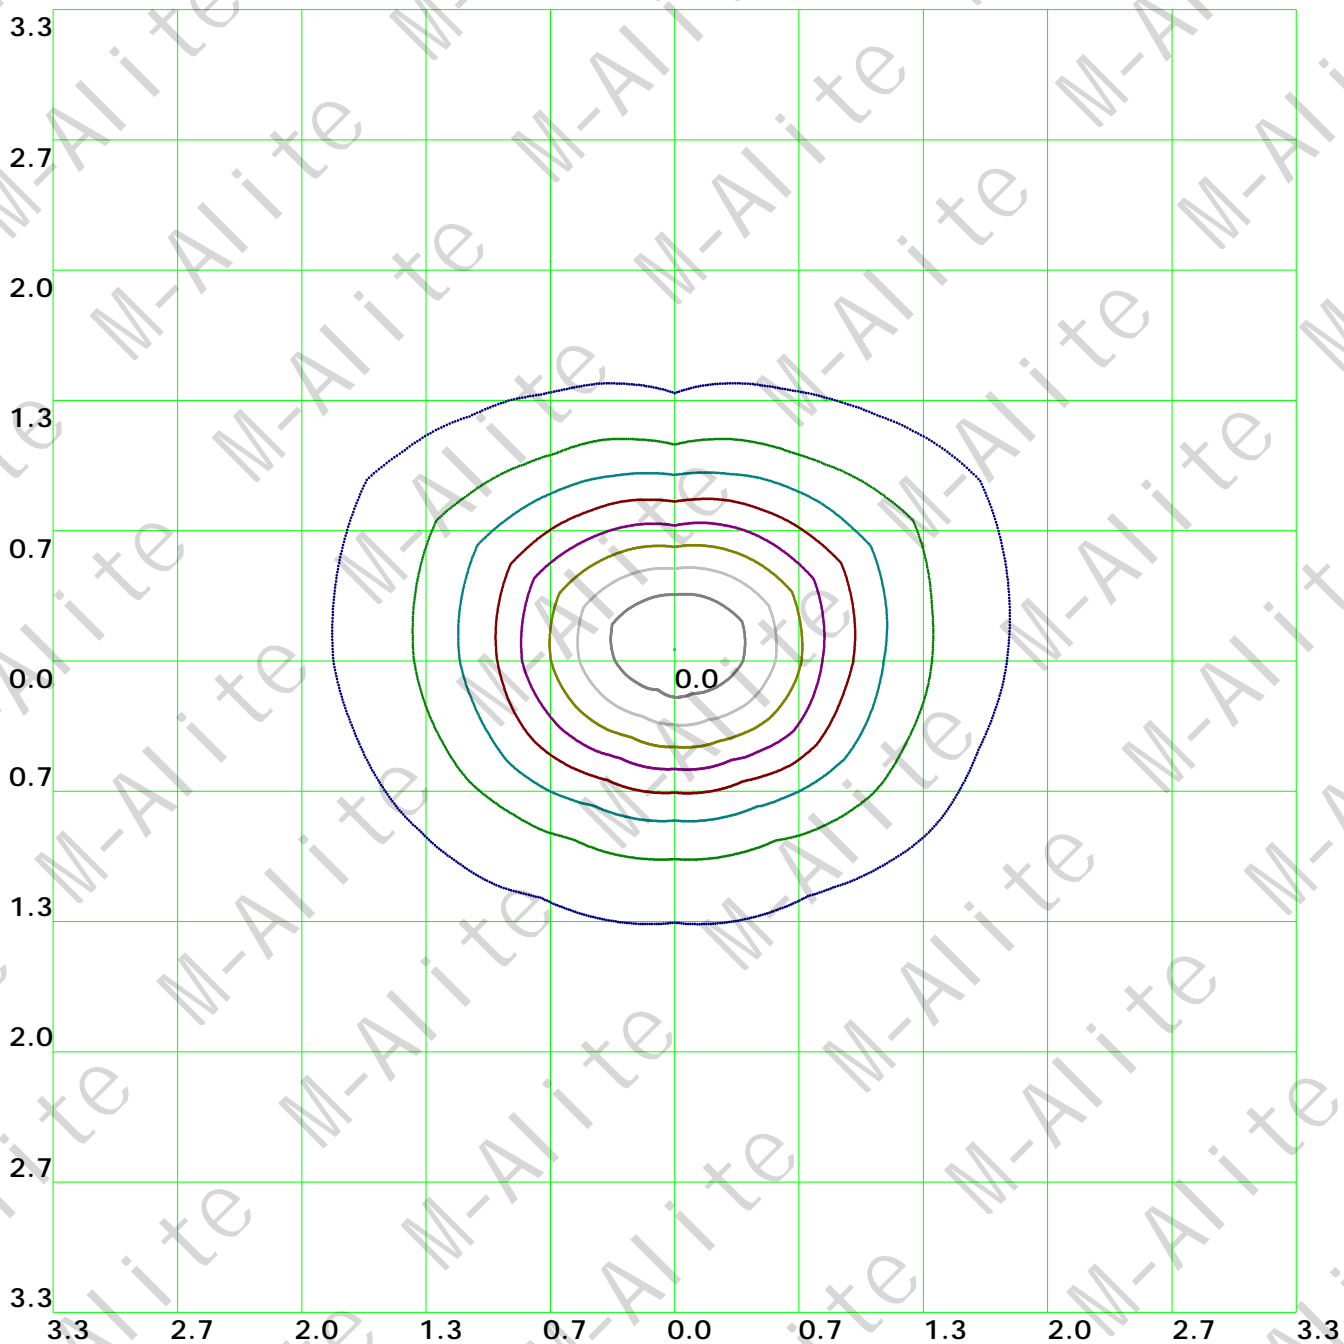

高度: 1 m

- (10%): 706.4lx — (20%): 1412.7lx — (30%): 2119.1lx — (40%): 2825.4lx
- (50%): 3531.7lx — (60%): 4238.1lx — (70%): 4944.4lx — (80%): 5650.8lx
- (90%): 6357.1lx — (100%): 7056.4lx

空间等照度曲线

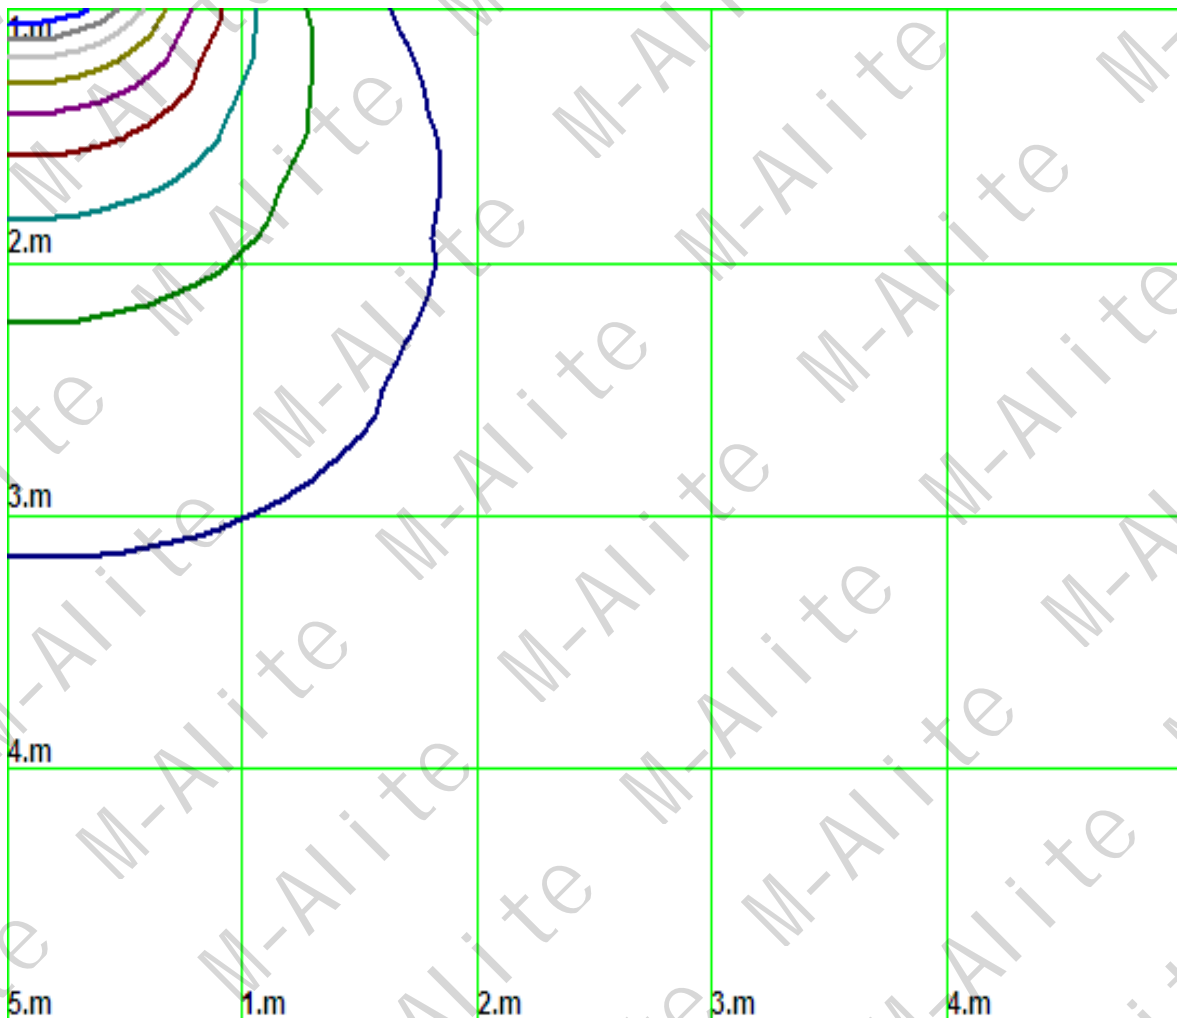

- (10%): 706.4lx
- (20%): 1412.7lx
- (30%): 2119.1lx
- (40%): 2825.4lx
- (50%): 3531.7lx
- (60%): 4238.1lx
- (70%): 4944.4lx
- (80%): 5650.8lx
- (90%): 6357.1lx
- (100%): 7056.4lx


亮度限制曲线（无发光侧边灯具）

直径: 0mm
长度: 0mm
宽度: 150mm
高度: 0mm

(cd/m²)


γ	45°	50°	55°	60°	65°	70°	75°	80°	85°
C0	140293	189377	469460	966350	1813399	2954129	5418045	936489	
C90	205072	215584	216510	205305	162747	120699	417529	905705	

眩光等级	质量等级	使用照度 (lx)							
		2000	1000	500	≤300				
1.15	A								
1.5	B		2000	1000	500	≤300			
1.85	C			2000	1000	500	≤300		
2.2	D				2000	1000	500	≤300	
2.55	E					2000	1000	500	≤300

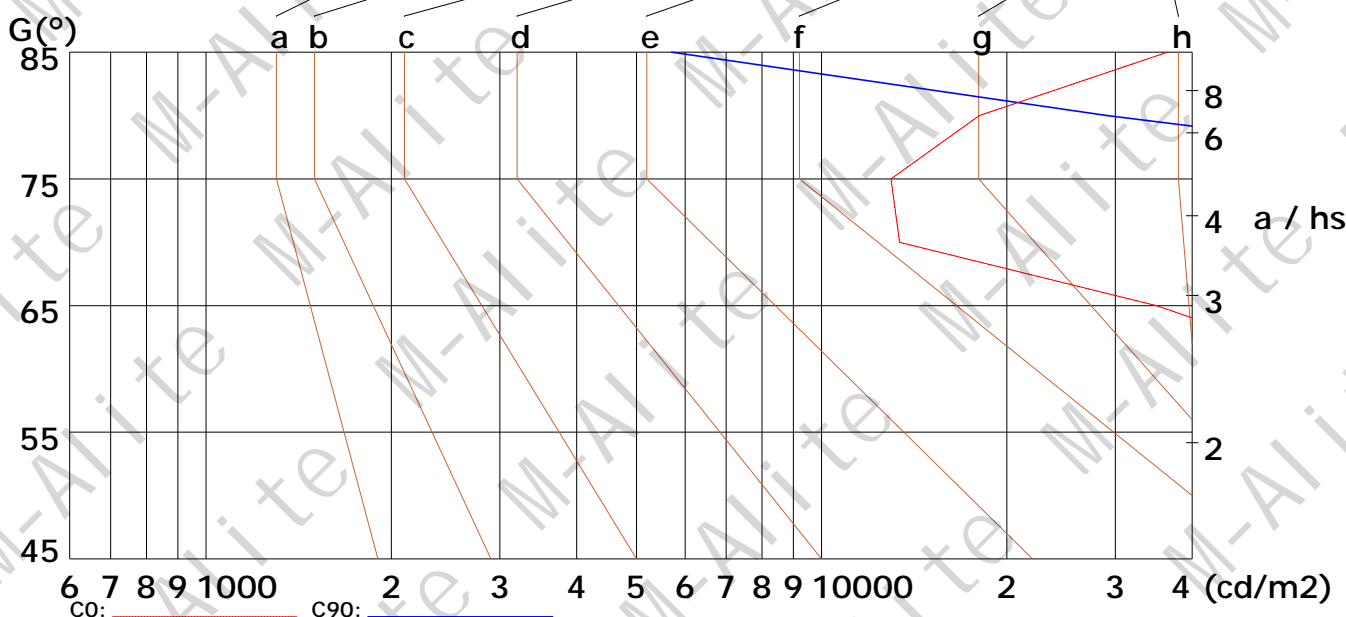

亮度限制曲线 (C0/C90)

照度距离关系曲线

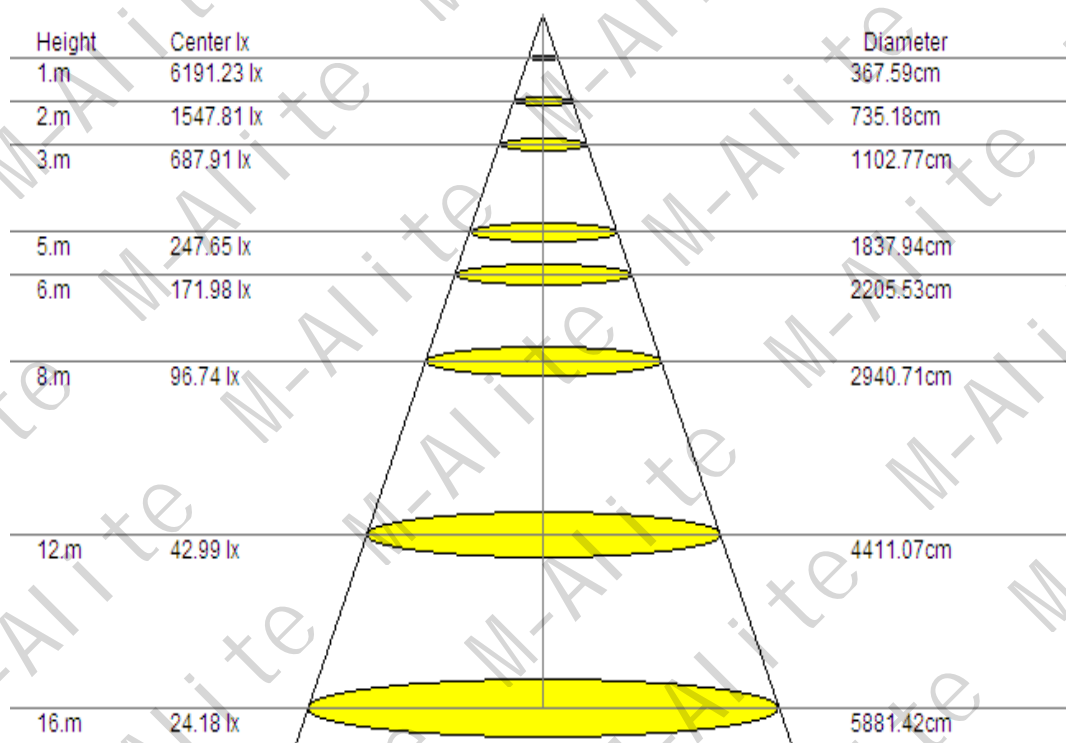


光束角:122.90°(50%Imax)

室内灯具利用系数表

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.07	1.05	1.04	1.05	1.04	1.02	1.02	1.00	0.98	0.97	0.95	0.93	0.90	0.88	0.86	0.81
2	0.92	0.89	0.88	0.91	0.88	0.86	0.89	0.85	0.82	0.85	0.81	0.78	0.80	0.76	0.73	0.68
3	0.79	0.76	0.74	0.79	0.75	0.73	0.77	0.73	0.70	0.75	0.70	0.66	0.72	0.67	0.62	0.58
4	0.68	0.65	0.64	0.68	0.65	0.62	0.68	0.63	0.60	0.66	0.61	0.57	0.64	0.58	0.54	0.50
5	0.60	0.57	0.55	0.60	0.56	0.54	0.60	0.55	0.52	0.59	0.54	0.49	0.58	0.52	0.47	0.43
6	0.52	0.50	0.48	0.53	0.49	0.47	0.54	0.49	0.45	0.53	0.48	0.43	0.53	0.46	0.41	0.37
7	0.46	0.44	0.42	0.47	0.44	0.41	0.48	0.43	0.40	0.48	0.42	0.38	0.48	0.41	0.36	0.33
8	0.42	0.39	0.38	0.42	0.39	0.37	0.44	0.39	0.35	0.44	0.38	0.34	0.44	0.37	0.32	0.29
9	0.37	0.35	0.34	0.38	0.35	0.33	0.40	0.35	0.32	0.40	0.35	0.30	0.41	0.34	0.29	0.26
10	0.34	0.32	0.30	0.35	0.32	0.30	0.36	0.32	0.29	0.37	0.31	0.27	0.38	0.31	0.26	0.24

室内灯具概算曲线图表

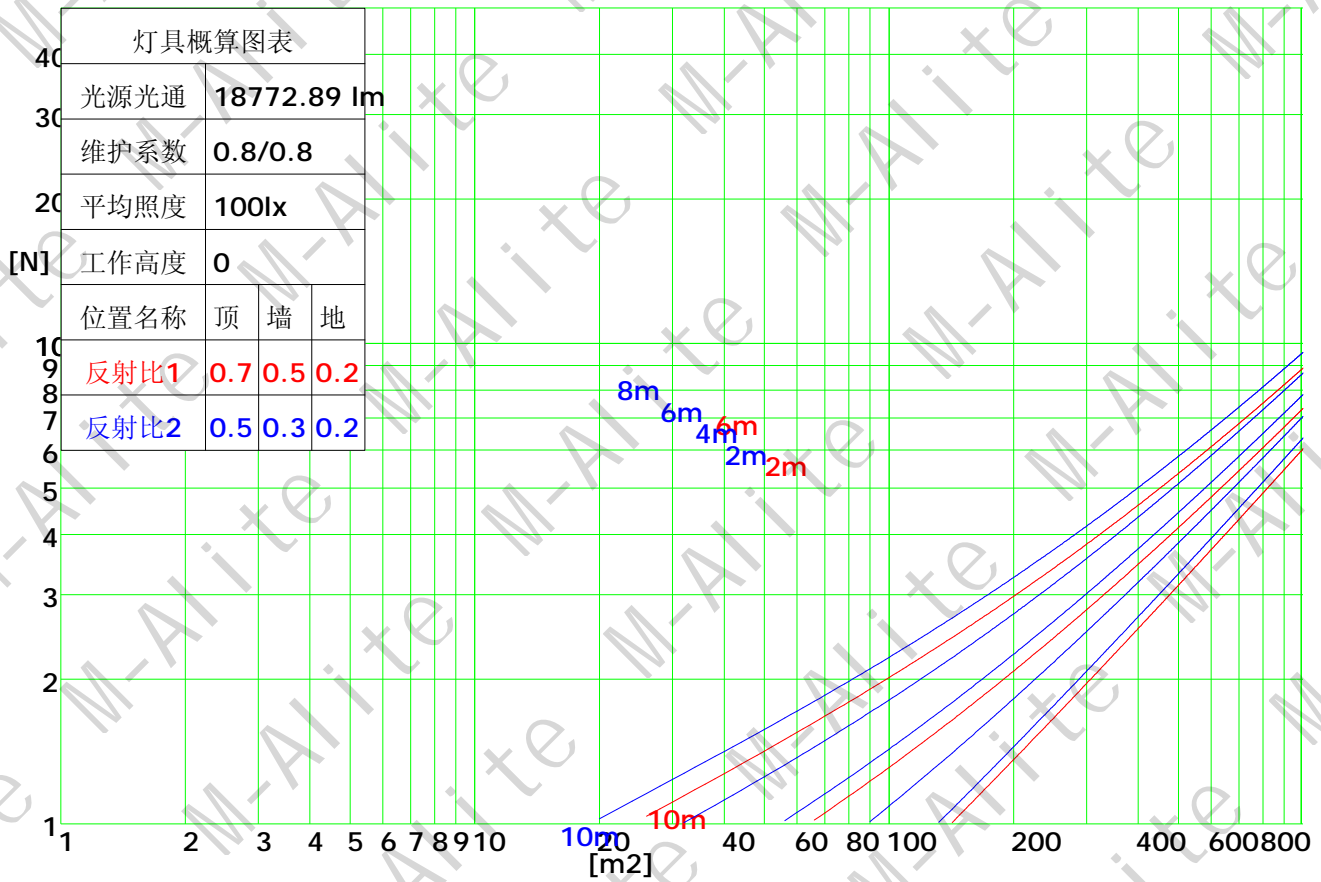

UGR综合眩光指数表

Ceiling	70	70	50	50	30	70	70	50	50	30	
Wall	50	30	50	30	30	50	30	50	30	30	
Floor	20	20	20	20	20	20	20	20	20	20	
Room Size	Left to light axis direction of observation					Direction of light axis parallel observation					
X	Y										
2H	2H	15.5	16.8	15.8	16.9	17.4	15.3	16.7	15.6	16.8	17.3
	3H	17.2	18.3	17.5	18.7	19.0	17.0	18.2	17.5	18.8	19.0
	4H	18.0	19.0	18.3	19.6	19.7	17.9	18.9	18.1	19.6	19.8
	6H	18.5	19.6	18.9	19.9	20.1	18.4	19.4	18.8	19.8	20.1
	8H	18.8	19.9	19.1	19.9	20.5	18.7	19.7	19.0	20.0	20.3
4H	12H	18.9	19.9	19.2	20.4	20.7	18.8	19.8	19.1	20.3	20.6
	2H	16.6	17.6	16.6	17.8	18.1	16.5	17.5	16.6	17.8	18.0
	3H	18.3	19.3	18.6	19.4	19.9	18.3	19.3	18.6	19.5	19.8
	4H	19.0	20.1	19.5	20.2	20.7	19.0	20.0	19.4	20.1	20.5
	6H	19.9	20.7	20.1	20.8	21.2	19.6	20.5	20.1	20.9	21.2
8H	8H	20.0	20.8	20.5	21.0	21.5	20.0	20.7	20.4	21.1	21.4
	12H	20.3	21.0	20.7	21.1	21.5	20.2	20.8	20.6	21.3	21.5
	4H	19.6	20.1	19.8	20.4	21.0	19.4	20.2	19.7	20.4	21.0
	6H	20.4	21.0	20.8	21.3	21.6	20.4	20.9	20.7	21.4	21.7
	8H	20.8	21.1	21.3	21.6	22.0	20.7	21.1	21.1	21.6	22.1
12H	12H	21.1	21.4	21.5	22.0	22.3	20.9	21.4	21.4	21.9	22.3
	4H	19.6	20.1	20.1	20.5	20.9	19.4	20.1	20.0	20.5	20.9
	6H	20.6	20.9	21.0	21.4	21.7	20.6	21.0	20.9	21.4	21.7
	8H	20.9	21.5	21.5	21.6	22.1	20.8	21.3	21.4	21.7	22.2