


Distribution


(150W/200W) Free tool to open the lamps, easy to install and maintain.

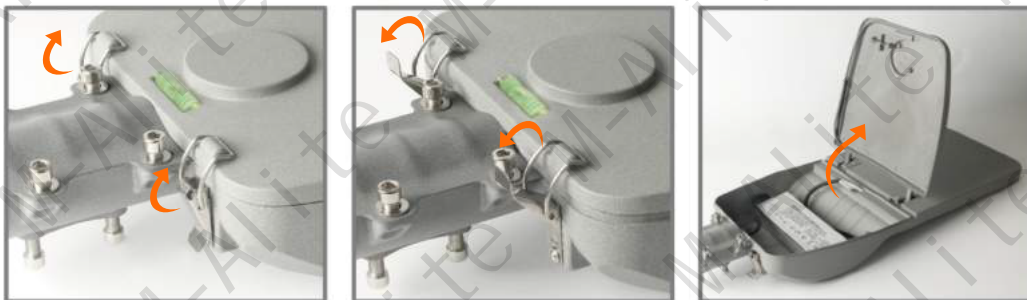

Installation

Wiring


AC input: L (brown or red) - firewire, N (blue or black) - neutral, (yellow-green) - ground line.

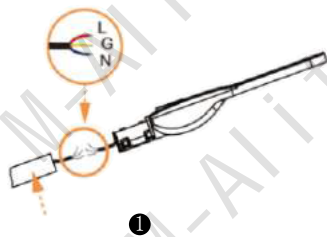

1

Install the Photocontrol

Place the photocontrol on the lamp body and lock it.

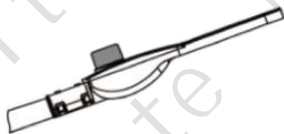

4

Install the pole

Put the pole into the lamp arm and fix the screw with a hex wrench. Be careful to lock it.




Hexagonal wrench

2

Adjust the angle

Adjust the lamp body horizontally to make the lamp body and the ground vertically, tighten the screws with a hex wrench.

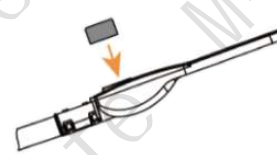

3

Assembly is completed



(If there is no light sensor, this step can be omitted)

5

