



ZHEJIANG ALITE LIGHTING CO., LTD.



Add: 2nd Floor, 8th Building, No. 188 East Development Avenue, Taizhou City, Zhejiang, China 318000
 Tel:+86-576-88861388 Fax:+86-576-88851399

ASL02A-40W

ASL02A-50W


ASL02A-60W

ASL02A-80W

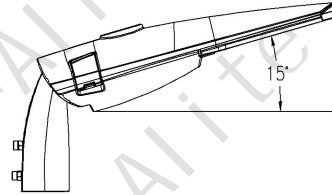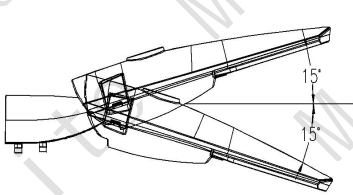


Luminaire tilt adjustment side entry:-15°to+15°

Luminaire tilt adjustment,post top:-15°to+15°

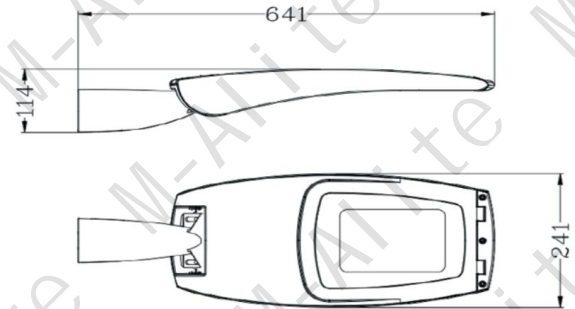

Product Code	ASL02A
Chip brand	EPISTAR/bridgelux/Philips
Driver Brand	SONSEN/MeanWell
Input Wattage	40W(64PCS3030) 50W(64PCS3030) 60W(96PCS3030) 80W(96PCS3030)
Color Temperature	3000/4000/5000K /5700K/6400K
Light effect	100-130 Lm/w
Input Voltage	AC85-265V
Frequency Range	50/60Hz
Power Factor	PF ≥ 0.95
color rendering index	Ra ≥ 70
Temperature of Working Condition	-30-+50°C
Light distribution	Bats airfoil light distribution
LED Lifetime	50000h
Protectin Grade	IP65
Installation Pipe Diameter	φ60mm
Installation Height	6-8m

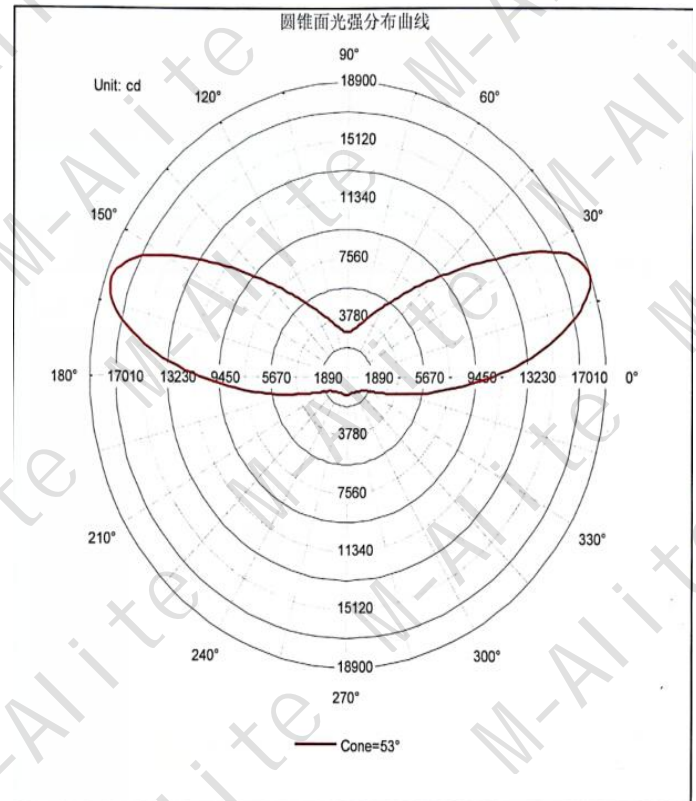

Net Weight	3.9kg
Gross Weight	4.6kg
Packing Size	690*290*165MM



ZHEJIANG ALITE LIGHTING CO., LTD.

Add: 2nd Floor, 8th Building, No. 188 East Development Avenue, Taizhou City, Zhejiang, China 318000


Tel:+86-576-88861388 Fax:+86-576-88851399

ASL02B-80W


ASL02B-100W

ASL02B-120W


ASL02B-150W

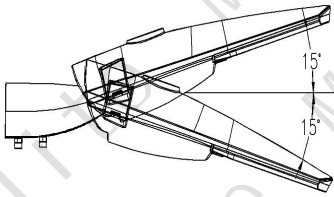


Luminaire tilt adjustment side entry:-15°to+15°

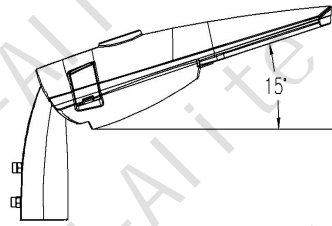

Luminaire tilt adjustment,post top:-15°to+15°

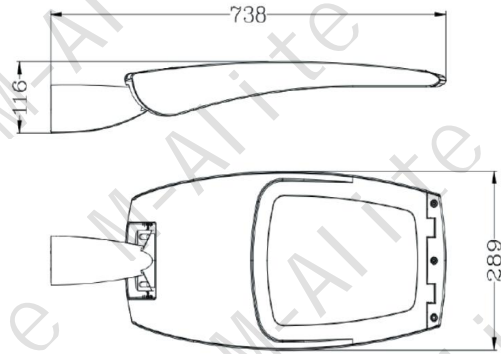

Product Code	ASL02B	
Chip brand	EPistar/bridgelux/Philips	
Driver Brand	SONSEN/MeanWell	
Input Wattage	80W(64PCS3030) 100W(128PCS3030) 120W(144PCS3030) 150W(192PCS3030)	
Color Temperature	3000/4000/5000K /5700K/6400K	
Light effect	100-130 Lm/w	
Input Voltage	AC85-265V	
Frequency Range	50/60Hz	
Power Factor	PF ≥ 0.95	
color rendering index	Ra ≥ 70	
Temperature of Working Condition	-30+50 °C	
Light distribution	Bats airfoil light distribution	
LED Lifetime	50000h	
Protectin Grade	IP65	Net Weight
Installation Pipe Diameter	φ60mm	Gross Weight
Installation Height	6-8m	Packing Size

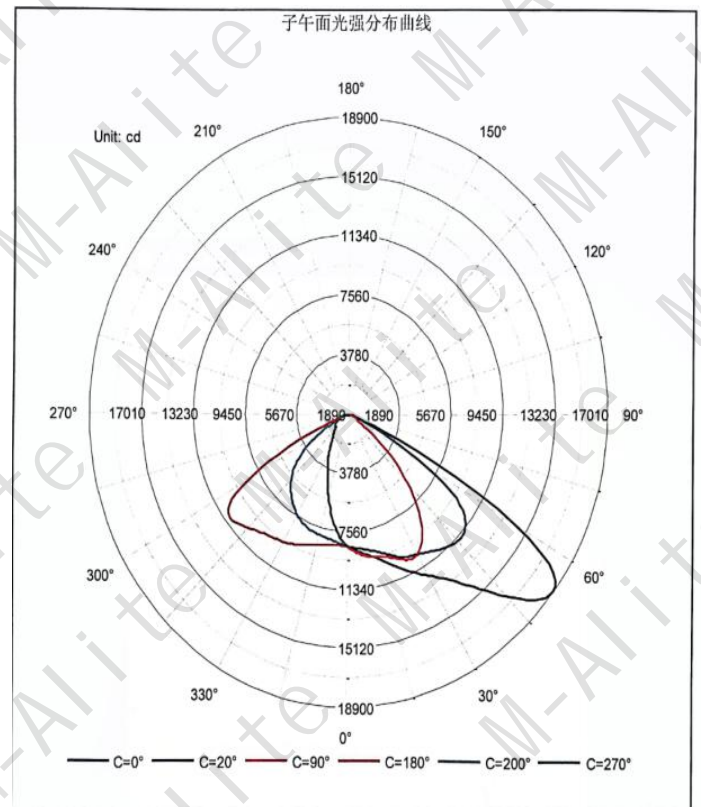

Net Weight	5.4kg
Gross Weight	6.5kg
Packing Size	790*340*165MM



ZHEJIANG ALITE LIGHTING CO., LTD.


Add: 2nd Floor, 8th Building, No. 188 East Development Avenue, Taizhou City, Zhejiang, China 318000

Tel:+86-576-88861388 Fax:+86-576-88851399


ASL02A-150W




ASL02A-180W

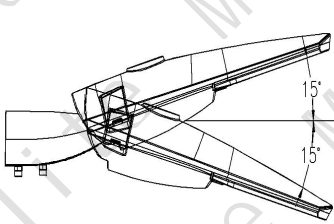


Luminaire tilt adjustment side entry:-15°to+15°



Luminaire tilt adjustment,post top:-15°to+15°

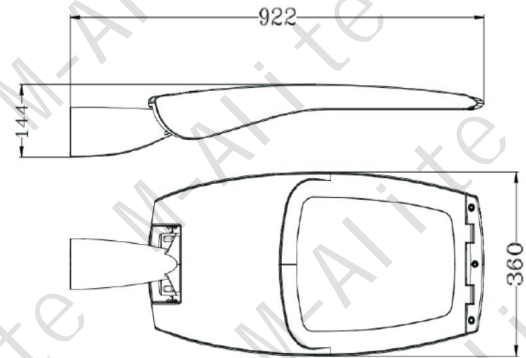

Product Code	ASL02C	
Chip brand	EPistar/bridgelux/Philips	
Driver Brand	SONSEN/MeanWell	
Input Wattage	150W(192PCS3030) 180W(192PCS3030)	
Color Temperature	3000/4000/5000K /5700K/6400K	
Light effect	100-130 Lm/w	
Input Voltage	AC85-265V	
Frequency Range	50/60Hz	
Power Factor	PF ≧ 0.95	
color rendering index	Ra ≧ 70	
Temperature of Working Condition	-30~+50 °C	
Light distribution	Bats airfoil light distribution	
LED Lifetime	50000h	
Protectin Grade	IP65	Net Weight
Installation Pipe Diameter	φ60mm	Gross Weight
Installation Height	6-8m	Packing Size

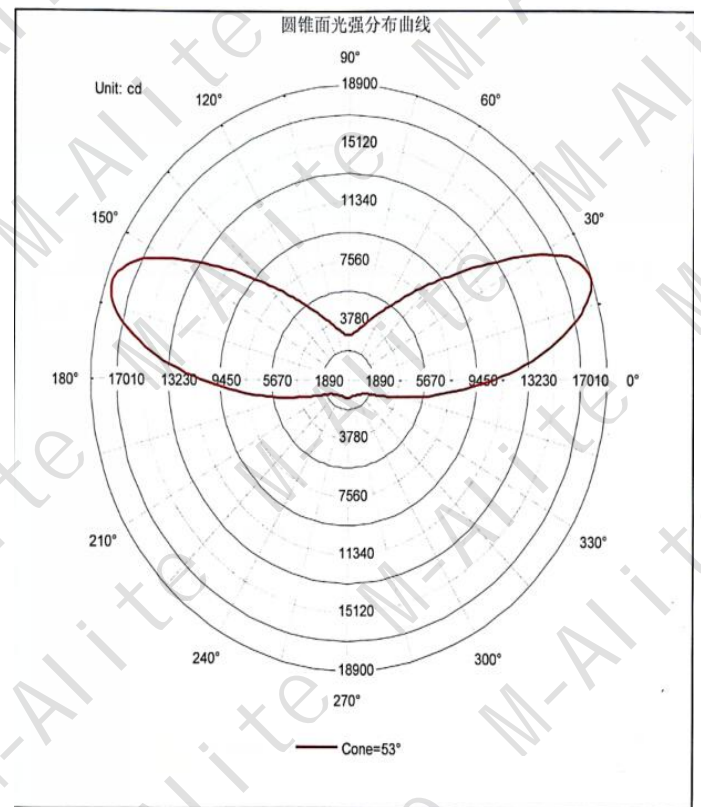

Net Weight	9.8kg
Gross Weight	11.3kg
Packing Size	970*410*195MM