



PIN	SYMBOL
1-6	NC
7	POL
8	/RESET
9	SPENA
10	SPCLK
11	SPDAT
12-19	B0-B7
20-27	G0-G7
28-35	R0-R7
36	HSYNC
37	VSYNC
38	DOTCLK
39-40	VDD(+5V)
41-42	VCC(+3.3V)
43-44	NC
45	VGL
46	NC
47	VGH
48-50	NC
51	VCOM
52	DEN
53	GND
54	AVSS

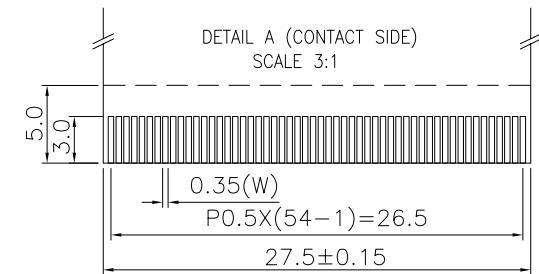

Notes:

1. 5.7" Transmissive, Normally-White TFT-LCD Module
2. View Direction: 12:00
3. LCD Drivers: HX8218+HX8615
4. Interface: 24-Bit Parallel RGB
5. Backlight: White LED
6. Operation Temp.: -20°C to 70°C
7. Storage Temp.: -30°C to 80°C

LED Backlight Diagram:

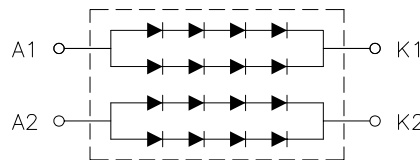

DWN.	YDY	TITLE	LCM OUTLINE DIMENSION		
CHK.	LYJ	PART NO.	VS057A-01A		
APPD.		DWG. NO.	VS057A-01A-WXB		
REV.	B	UNIT	mm	PROJECTION	
DATE	'10.08.23	SCALE	NTS	SHEET	1 OF 1