



## Product information

# Three-phase three-wire AC filter-DAC1

## Description

Simple installation, bolt mode link, customizable, using single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

## Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2750VAC(line/ground)
Insulation Resistance	>50M @500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

## Approval & Compliance



## Features

Rated current : 6A-20A

Strong anti-jamming

Low frequency performance is good, can be used for high current equipment

Can be customized upon request

## Applications

Power equipment such as UPS

General electronic equipment


Power monitoring equipment

Measuring equipment


## Performance Indicator

Standard	High	Very High
<div></div>		

## Rated Current [A]

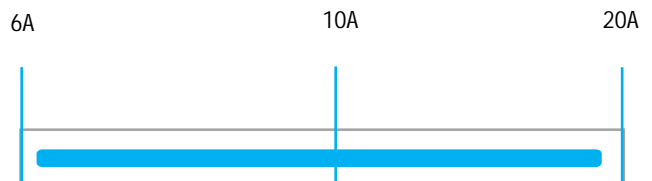


## Typical Circuit Diagram

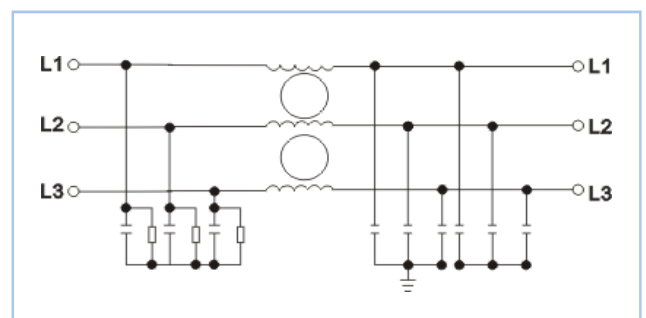

Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DAC1-6A	6A	<2.0mA	C1	Bolt	Bolt	CE、ROHS	Parameter customization
DAC1-10A	10A	<2.0mA	C1	Bolt	Bolt		
DAC1-20A	20A	<2.0mA	C1	Bolt	Bolt		

Overall Dimension ( ±1mm)

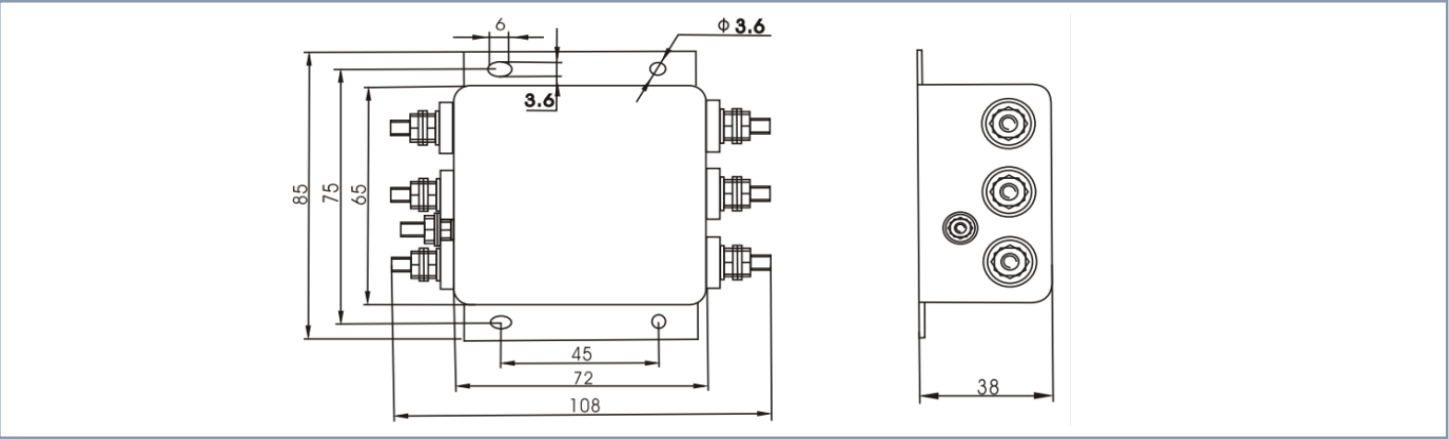

Insertion loss -(common mode)

