



Product information

Three-phase four-wire AC filter-DAC3-D

Description

Simple installation, bolt mode link, customizable, using single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2750VAC(line/ground)
Insulation Resistance	>50M @500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features

Rated current : 6A-30A

Strong anti-jamming

Low frequency performance is good, can be used

Use the terminal block connection mode

Can be customized upon request

Applications

Switching power supply

Power equipment such as UPS


Power monitoring equipment

Measuring equipment


Performance Indicator

Standard	High	Very High
<div></div>		

Rated Current [A]

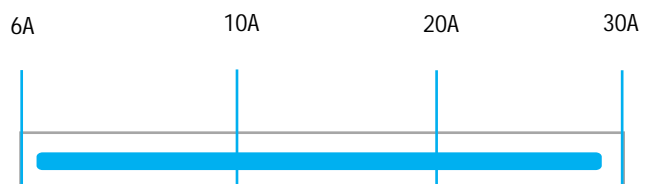


Typical Circuit Diagram

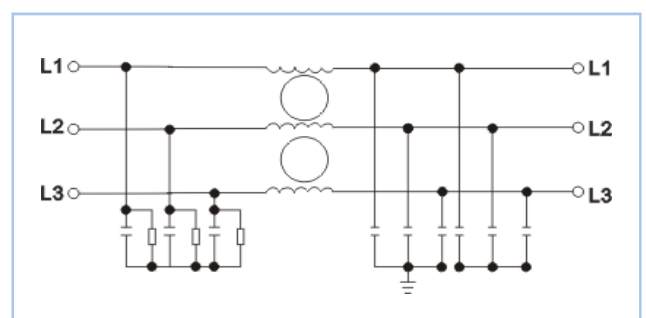

Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DAC3-D-6A	6A	<2.0mA	C3	Bolt	Bolt	CE、ROHS	Parameter customization
DAC3-D-10A	10A	<2.0mA	C3	Bolt	Bolt		
DAC3-D-20A	20A	<2.0mA	C3	Bolt	Bolt		
DAC3-D-30A	30A	<2.0mA	C3	Bolt	Bolt		

Overall Dimension (±1mm)

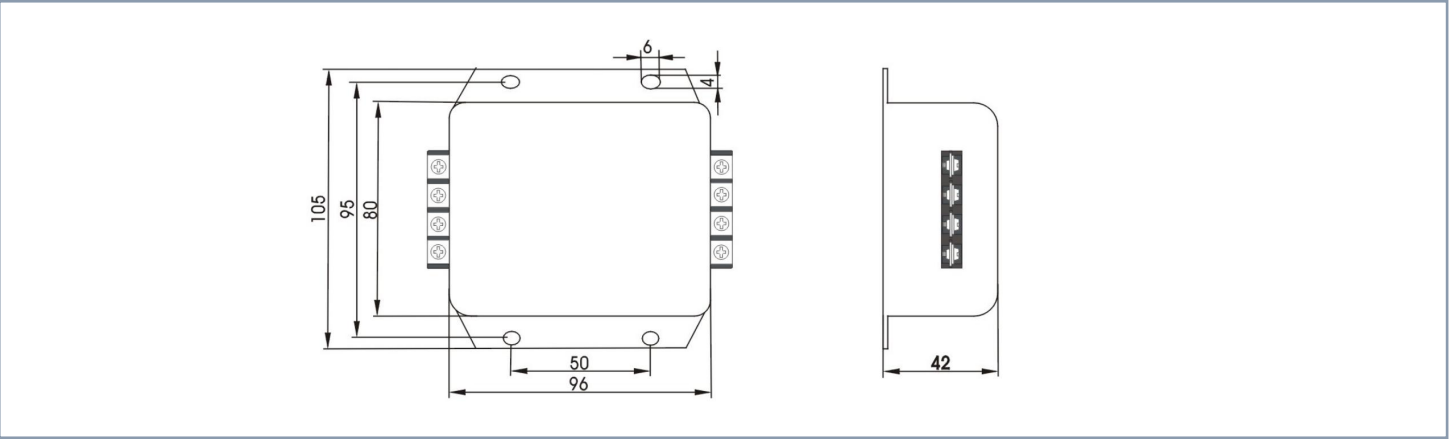

Insertion loss -(common mode)

