



Product information

Three-phase three-wire AC filter-DAC6

Description

Simple installation, bolt connection, customizable, single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2750VAC(line/ground)
Insulation Resistance	>50M @500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features

Rated current :80A-200A

Low frequency performance is good, can be used for high current equipment

Can be customized upon request

Applications

Switching power supply


General electronic equipment

Power equipment such as UPS


Power monitoring equipment

Measuring equipment


Performance Indicator



Rated Current [A]

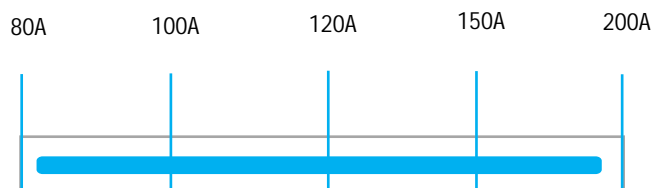


Typical Circuit Diagram

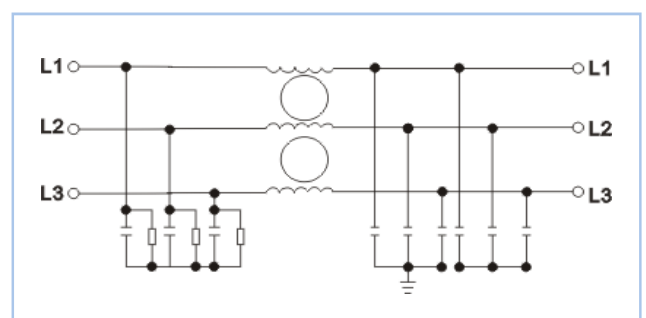

Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DAC6-80A	80A	<2.0mA	C6	Bolt	Bolt	CE, ROHS	Parameter customization
DAC6-100A	100A	<2.0mA	C6	Bolt	Bolt		
DAC6-120A	120A	<5.0mA	C6	Bolt	Bolt		
DAC6-150A	150A	<8.0mA	C6	Bolt	Bolt		
DAC6-200A	200A	<8.0mA	C6	Bolt	Bolt		

Overall Dimension (±1mm)

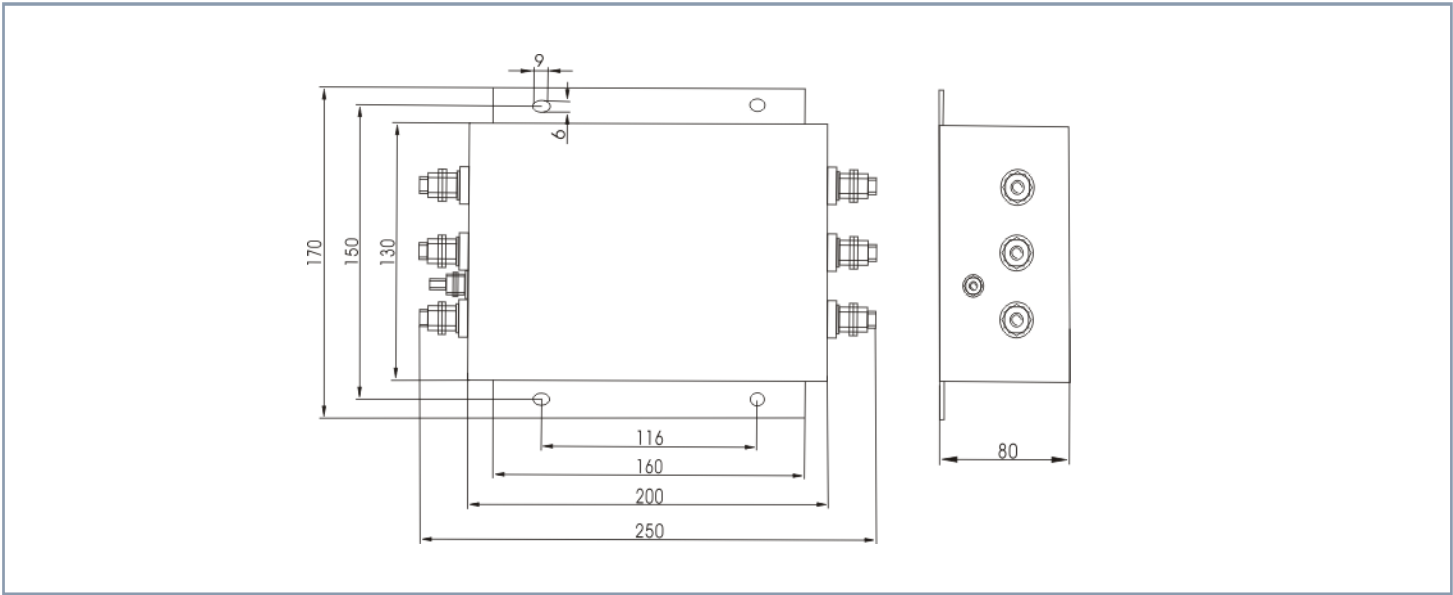

Insertion loss -(common mode)

