

User Guide

24-Port 10/100Mbps+1G Combo+1GE Ethernet Switch

Package Contents

Check the following contents of your package:

- Switch x 1
- User Guide x1
- Power Cord x1
- Accessories(Rack Mount Accessory Kit*2 ,Rubber Feet*4, screw*8)

If any part is lost and damaged, please contact your local agent immediately.


Introduction

Switch provides Product have 24-Port 10/100Mbps+1G Combo+1GE Ethernet Switch, Using store and forward technology, combined with dynamic memory allocation, to ensure the effective allocation of bandwidth to each port, CCTV function which can improve the network environment and reduces network maintenance costs. This switch is easy to install and does not require configuration, It is easy to manage and maintain which can meet a lot of networking environment, such as Business building, Community, Hotel, Office etc.

Hardware Description

Front Panel

The Front Panel Consists of Ethernet Ports. The LED indicators are also located on the panel.

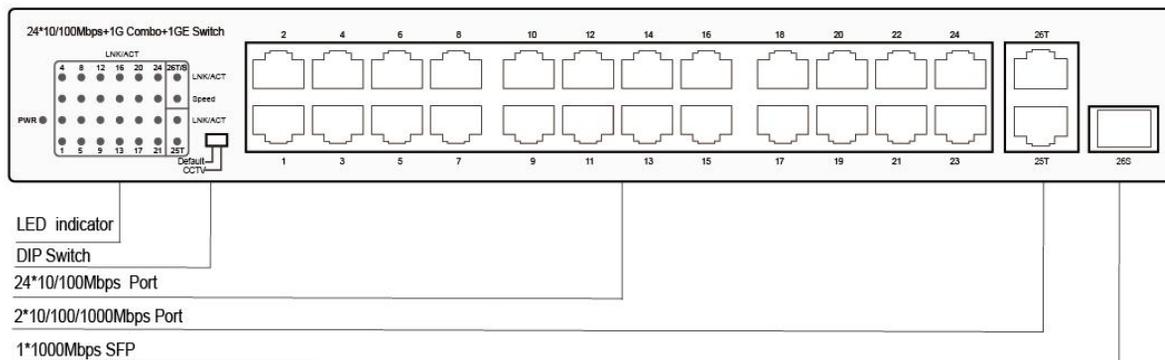

DIP Switch

The DIP switch located on the left panel.

Default: the factory default mode, can normal communication between port 1~26.

CCTV mode: 1-24 port can be isolated each other but 1-24 port can connect to 25/26 port after open CCTV to stop broadcast storm to increase forwarding rate of frame. The CCTV mode, Up to 250m PoE distance allows you to It can solve the problem of long-distance transmission in network monitoring engineering and guarantee the security of network.


Note: after changing the mode, there is no need to restart manually.

LED indicator

LED	Color	Function
PWR	Green	Off: No Power supply. Light: Indicates the switch has power.
LNK/ACT	Green	Off: No device is connected to the corresponding port. Light: Indicates the link through that port is successfully established at 10/100Mbps. Blink: Indicates that the Switch is actively sending or receiving data over that port.
Speed	Green	Off: Indicates the link through established at 10/100Mbps. Light: Indicates the link through established at 1000Mbps.

Rear Panel

The rear panel of the Switch indicates an AC inlet power socket, which accepts input power from 100 to 240V AC, 50/60HZ.

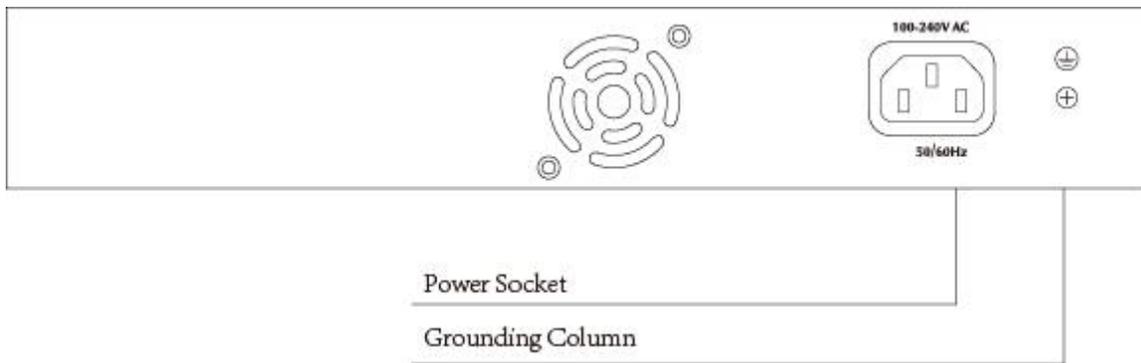

Power socket

Connect the female connector of the power cord here, and the male connector to the AC(Alternating Current) power outlet. Please make sure the voltage of the power supply meets the requirement of the input voltage

Grounding column

The switch already comes with lightning protection mechanism, for safety consideration, You should ground the switch through the PE (Protecting Earth) cable by Grounding Column.

Installation the Switch


This part describes how to install your Ethernet Switch and make connections to it. Please follow the following instructions in avoid of incorrect installation causing device damage and security threat.

- Before cleaning the switch, unplug the power plug of the switch first. Do not clean the switch with wet cloth or liquid;
- Do not place the switch near water or any damp area. Prevent water or moisture from entering the switch chassis;
- Do not place the switch on an unstable case or desk. The switch might be damaged severely in case of a fall;
- Ensure proper ventilation of the equipment room and keep the ventilation vents of the switch free of obstruction;

- Make sure that the operating voltage is the same one labeled on the switch;
- Do not open the chassis while the switch is operating or when electrical hazards are present to avoid electrical shocks.


Desktop Installation

Install the Switch on a desktop, please attach these cushioning rubber feet provided on the bottom at each corner of the Switch in case of the external vibration. Allow adequate space for ventilation between the device and the objects around it.

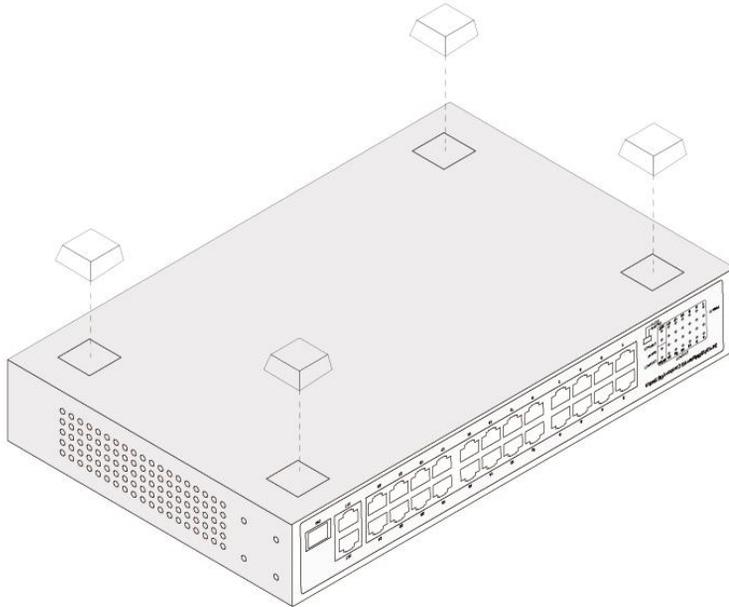

Rack-mountable Installation

The switch is rack-mountable and can be installed on an EIA-19 inch equipment rack. To do this, first, please install the mounting brackets on the switch's side panels (one on each side), secure them with the included screws, and then use the screws provided with the equipment rack to mount the switch on the 19 inch rack.

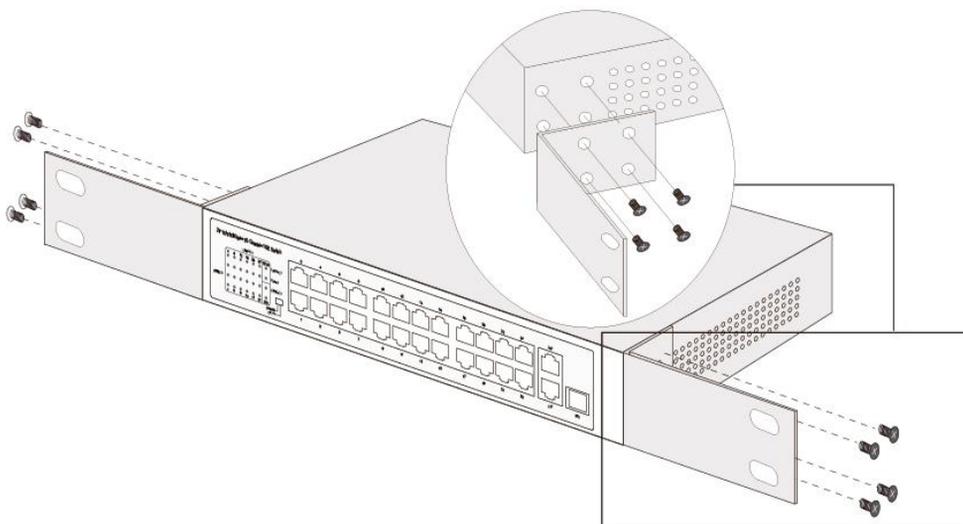


Turn on the switch

Please connect the AC power cord into the rear of the switch and to an electrical outlet (preferably one that is grounded). When the switch is power on, the LED indicators flash momentarily for one second, which represents a resetting of the system. The Power LED indicator turns on green.

Note: Please confirm the voltage is correct before power on, otherwise the switch will be damaged.

(The power input is:100V-240Vac, 50/60Hz)

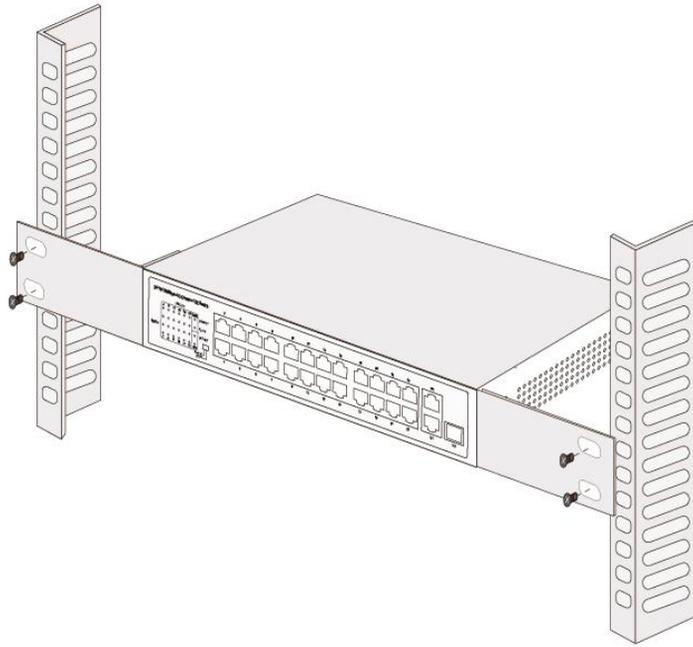

Specifications

Model	24FE+1G Combo+1GE Ethernet Switch
Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3x, IEEE802.3az , IEEE802.3ab
Network Media	10BASE-T: UTP category 3,4,5 cable (≤100m) 100BASE-TX: UTP category 5 cable (≤100m) 1000BASE-T: UTP category 5e cable (≤100m)
MAC Address Table	16K, Auto-learning, Auto-aging
Transfer mode	Store-and-Forward
Frame Forward Rate	10Base-T: 14881pps/Port 100Base-TX: 148810pps/Port 1000Base-T/X: 1488095pps/Port
Switching Capacity	8.8 Gbps
Forwarding Rate	6.55Mpps
Packet buffer	4M bit
Dimensions (L*W*H)	280 *180 *44 mm
Fan	Fanless
Power Input	AC: 100~240V, 50/60Hz
Temperature	Operating Temperature: 0°C ~ 40 °C (32 °F ~104°F) Storage Temperature: -40 °C ~ 70 °C (-40 °F ~158°F)
Humidity	Operating Humidity: 10% ~ 90% non-condensing Storage Humidity: 5% ~ 90% non-condensing
Green energy saving	IEEE 802.3az
MTBF	>50000 hours