

# **User Guide**

**2\*10/100/1000Mbps+1GE PoE Switch**

## Package Contents

Check the following contents of your package:

- PoE Switch x 1
- User Guide x 1
- Power Cord x 1
- Accessories(Feet\*4)

If any part is lost and damaged, please contact your local agent immediately.

## Introduction


2+1 Gigabit Provides the seamless network connection. The PoE ports (Port2~3) can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PD). The electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as AP, IP Cameras or IP Phones, etc.

It is easy to install and don't need to configuration. With outstanding performance and quality, the 3-port 10/100/1000Mbps desktop PoE switch is an ideal choice for expanding your home or office network.

## Hardware Description

### Front Panel

The Front Panel of 2+1 Gigabit Consists of 3-Port 10/100/1000Mbps Ethernet RJ45 Ports. The LED indicators are also located on the panel.

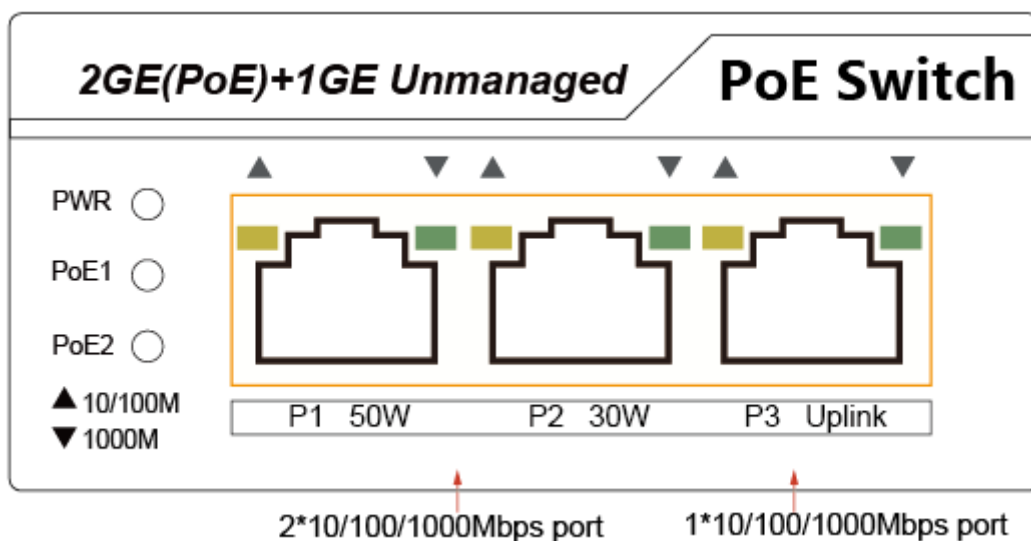


## LED indicator

LED	Color	Function
PWR	Green	Off: No Power supply. Light: Indicates the switch has power.
DATA	Green Orange	Off: No device is connected to the corresponding port. Green: Indicates the link through that port is successfully established at 1000Mbps. Orange: Indicates the link through that port is successfully established at 10/100Mbps. Blink: Indicates that the Switch is actively sending or receiving data over that port.
PoE	Green	Off: No PoE powered device (PD) connected. Light: There is a PoE PD connected to be port, which supply power successfully. Blink: Indicates port abnormal power supply.

## Rear Panel

The rear panel of 2+1 Gigabit indicates AC inlet power socket and Grounding column.

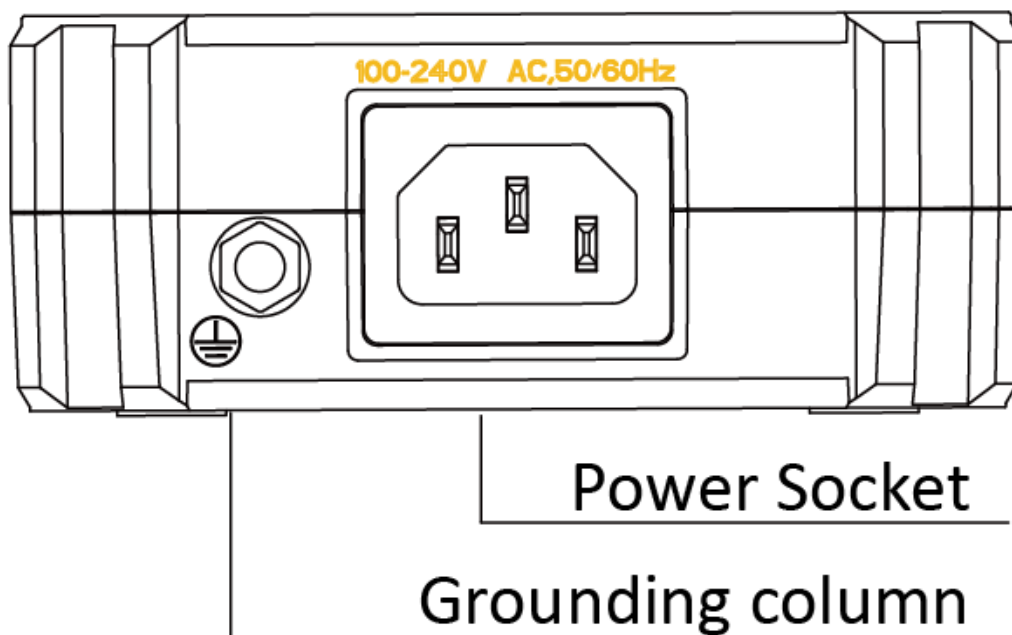


## Installation the Switch

This part describes how to install your Ethernet Switch and make connections to it. Please follow the following instructions in avoid of incorrect installation causing device damage and security threat.

- Before cleaning the switch, unplug the power plug of the switch first. Do not clean the switch with wet cloth or liquid;
- Do not place the switch near water or any damp area. Prevent water or moisture from entering the switch chassis;
- Do not place the switch on an unstable case or desk. The switch might be damaged severely in case of a fall;
- Ensure proper ventilation of the equipment room and keep the ventilation vents of the switch free of obstruction;
- Make sure that the operating voltage is the same one labeled on the switch;
- Do not open the chassis while the switch is operating or when electrical hazards are present to avoid electrical shocks.

### Desktop Installation


Install the Switch on a desktop, Allow adequate space for ventilation between the device and the objects around it. The bottom of the switch is shown in figure:

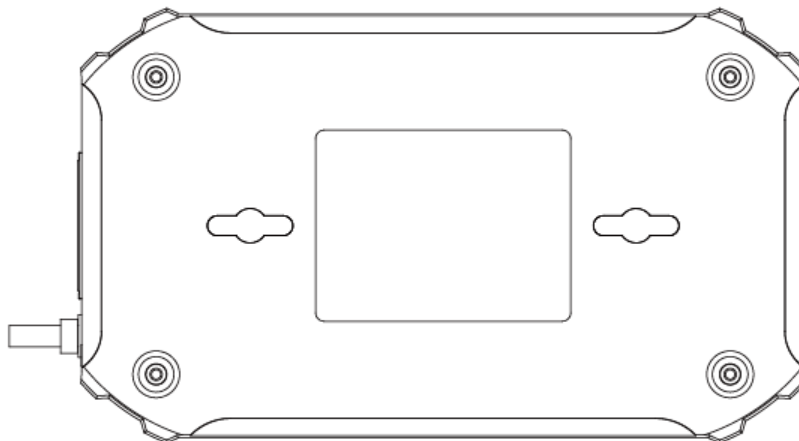

### Wall-mounted installation

In the first two fixed screw on the wall as shown in the figure below

Aim at the two fixed hole switches, and the machine smoothly on the screw

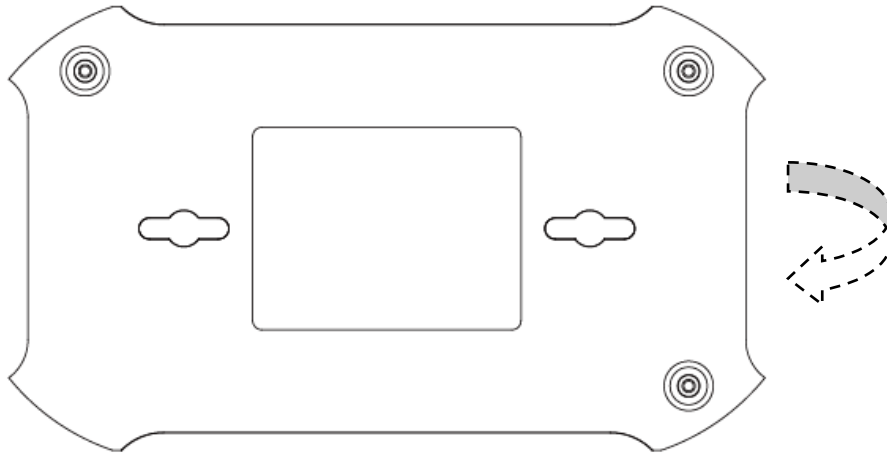

### **Turn on the switch**

The PoE switch can be used with AC power supply. Powering on the switch, it will automatically initialize and its LED indicators will respond as follows:

Firstly, the Power LED indicator will light up.

Then, the data LED indicators will flash momentarily for one second, which represents a resetting of the system.

## Specifications

Model	2+1 Gigabit
Standard	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
Network Media(Cable)	10BASE-T: UTP category 3,4,5 cable (≤100m) 100BASE-TX: UTP category 5 cable (≤100m) 1000BASE-T: UTP category 5e cable (≤100m)
MAC Address Table	2K, Auto-learning, Auto-aging
Transfer mode	Store-and-Forward
Frame Forward Rate	10Base-T: 14881pps/Port 100Base-TX: 148810pps/Port 1000Base-T/X: 1488095pps/Port
Switching Capacity	6Gbps
Dimensions (L*W*H)	160 *94*40mm
Fan	Fanless
Power input	AC 100V-240V 50/60Hz
PoE Port	Port2~3
PoE Power on RJ45	Mode A Anode1/2 Cathode 3/6
PoE Output	50W+30W(Max)
Temperature	Operating Temperature: 0°C ~ 40 °C (32 °F ~104°F ) Storage Temperature: -40 °C ~ 70 °C (-40 °F ~158°F )
Humidity	Operating Humidity: 10% ~ 90% non-condensing Storage Humidity: 5% ~ 90% non-condensing