







UVC CONDITIONER



APPLICATION

- School
- Apartment
- Hospital
- Office
- Restaurant
- Shopping Mall
- Fitness room
- GYM

DIMENSIONS

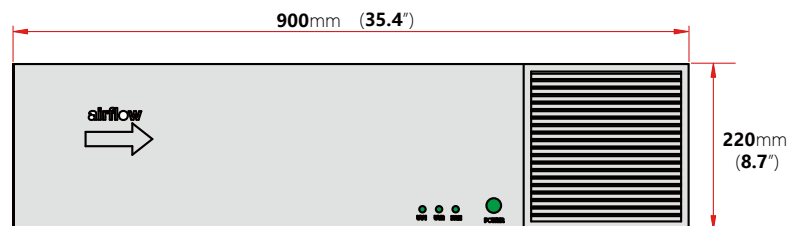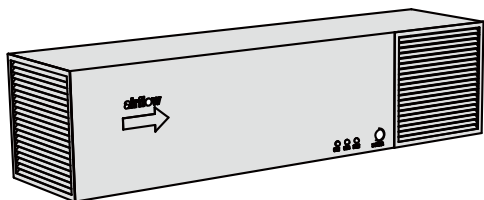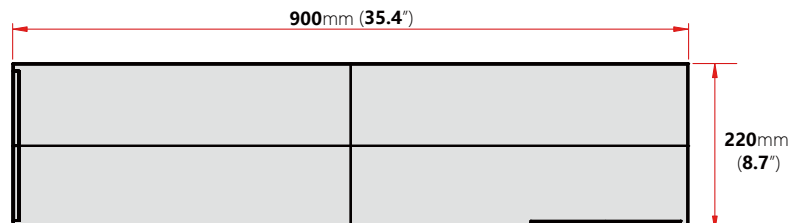

Jiaying Shinetoo Lighting Co.,Ltd.

Add: No.258, Xingchang Road, Xincheng Town, Xiuzhou District, Jiaying, Zhejiang, China 314015
Tel : +86-573-8350-0001 Fax : +86-573-8350-0005
Mobile : +86-138-0961-6725/+86-138-1878-3129
Email: Sales@stledlights.com

Shinetoos Lighting USA LLC

Add: 12638, 1265 Rand RD, Des Plaines, IL 60016
Ph: (224)567-8070 M: (847)899-1678
Email: Sales@stledlights.com

UVC Conditioner - kill 99% of viruses



UVC Conditioner

Lamp Technology: UV-C

Lamp Qty: 2 / 4

Dimensions: 900mm-W x 220mm-D x 220mm-H
35.4"-W x 8.7"-D x 8.7"-H

Weight: 15KG / 33LBS

Voltage: 110-120V AC, 50/60Hz
220-240V AC, 50/60Hz

Total Watts: -

Single-lamp Watts: 36W

UV Output : 110 @ 254nm $\mu\text{W}/\text{cm}^2$ (@1m)

Single-lamp UV Output: 12W

Expected Lifespan: 8,000+ Hours

UV Wavelength: UV-C, 200nm - 280nm (254 nm peak)

Lamp Type: UVC Lamp

Lamp Base: -

Replacement Lamp: -

Power Factor: >0.9

Delay: 0 Seconds

Maximum Treatment Time: 24 Hours

Amps: 2A / 3A

Ambient Operating Temp: 26.7 C / 80°F

Materials: 304 Stainless Steel

Mounting: Hanging

Noise level: 30-70dBa

Maximum Speed: 60CFM / 120CFM

Ratings/Features

Short-wave Germicidal Light

kill 99% of viruses and other germs

PLEASE NOTE: UVC light is harmful for eyes and skin which can cause temporary or permanent loss of vision and temporary acute redness or ulceration. UVC LIGHT MUST BE invisible during operation, DO NOT operate the UVC light equipment in any application non-isolated. NEVER LOOK DIRECTLY AT THE UVC LIGHT OR DISINFECTING TARGET AREA. DO NOT TOUCH THE LAMPS WITH BARE HANDS. WARNING SIGN MUST SET UP DURING OPERATION.

Jiaxing Shinetoo Lighting Co.,Ltd.

Add:No.258, Xingchang Road, Xincheng Town, Xiuzhou District, Jiaxing, Zhejiang, China 314015
Tel : +86-573-8330-0001 Fax : +86-573-8350-0005
Mobile : +86-138-0961-6725/+86-138-1878-3129
Email:Sales@stledlights.com

Shinetoo Lighting USA LLC

Add: 12638,1265 Rand RD, Des Plaines, IL 60016
Ph: (224)567-8070 M:(847)899-1678
Email:Sales@stledlights.com



广微测
Gmicro Testing



201819000883




中国认可
国际互认
检测
TESTING
CNAS L1747

GUANGDONG DETECTION CENTER OF MICROBIOLOGY



REPORT FOR ANALYSIS

Report No.:2020FM18218R01E Verification Code: 51720689

Name of Sample	UV sterilize light cart	Test Type	Entrustment Test
Applicant	Jiaxing Shinetoo Lighting Co.,LTD.	Address	No.258 Xinchang Road,Xincheng Town,Jiaxing city,Zhejiang Province,China
Sample Source	Submitted for Testing by the Applicant	Sample Quantity	One Sample Submitted
Spec and Lot No of Sample	ST-UVC144W	State and Characteristic	Machine
Sample Received Date	2020-06-19	Test Completion Date	2020-07-03
Test Standard and Method	Technical Standard for Disinfection (2002 Ministry of Health P.R.China)- 2.1.5.4		
Item Tested	Validation of disinfection efficacy of sterilization and disinfection instruments		
Test Conclusion	The test data of the sample(s) is attached to the page(s) of this report.		
Remarks	<p style="text-align: right;">Issue Date: 2020-07-22 (Official Seal)</p> 		

生物
★
检验检测

Editor: Chen Yingting

Verifier: Sun Jias

Approver: Xie Xiaobao



GUANGDONG DETECTION CENTER OF MICROBIOLOGY

ANALYSIS AND TEST RESULT

Report No.: 2020FM18218R01E

1. Sample pretreatment: Glass was used as the carrier of microbial sheet. The microbial sheet was placed 3m under the lamp during the test. Treatment time was 30 minutes.

2. Test Result:

Test Organisms	Test groups	Average number of positive controls (cfu/pcs)	Average number of testing groups (cfu/pcs)	Killing rate (%)	Sterilization logarithm
<i>Escherichia coli</i> 8099	1	1.4×10 ⁶	80	99.99	4.25
	2	1.3×10 ⁶	50	99.99	4.41
	3	1.3×10 ⁶	50	99.99	4.41
<i>streptococcus pneumoniae</i> ATCC 49619	1	1.9×10 ⁶	1.6×10 ²	99.99	4.08
	2	1.9×10 ⁶	1.5×10 ²	99.99	4.11
	3	1.7×10 ⁶	1.1×10 ²	99.99	4.19

(blank below)

分析
专用